


Micro800 Programmable Controller Family

Bulletin 2080

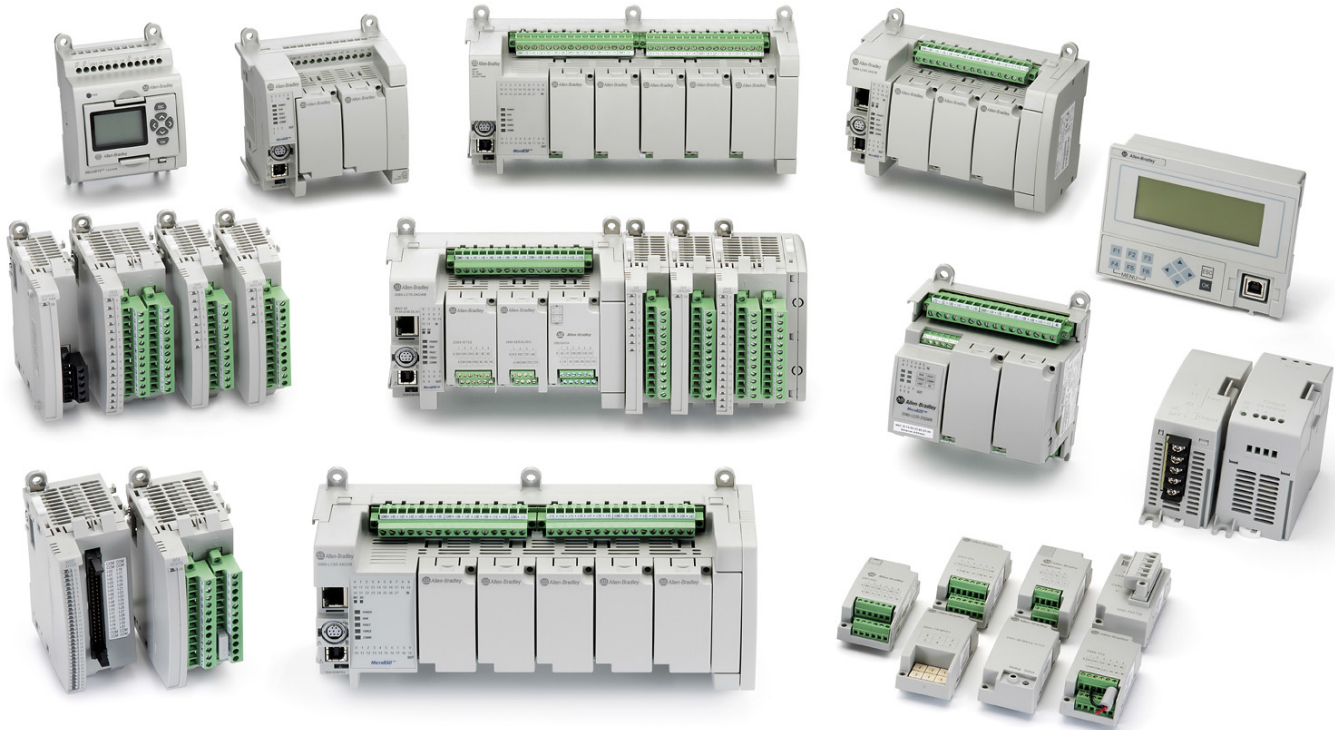

Important User Information

Solid-state equipment has operational characteristics differing from those of electromechanical equipment. Safety Guidelines for the Application, Installation and Maintenance of Solid State Controls (publication [SGL-1.1](#) available from your local Rockwell Automation sales office or online at <http://www.rockwellautomation.com/literature/>) describes some important differences between solid-state equipment and hard-wired electromechanical devices. Because of this difference, and also because of the wide variety of uses for solid-state equipment, all persons responsible for applying this equipment must satisfy themselves that each intended application of this equipment is acceptable.

In no event will Rockwell Automation, Inc. be responsible or liable for indirect or consequential damages resulting from the use or application of this equipment.

The examples and diagrams in this manual are included solely for illustrative purposes. Because of the many variables and requirements associated with any particular installation, Rockwell Automation, Inc. cannot assume responsibility or liability for actual use based on the examples and diagrams.

No patent liability is assumed by Rockwell Automation, Inc. with respect to use of information, circuits, equipment, or software described in this manual.

Reproduction of the contents of this manual, in whole or in part, without written permission of Rockwell Automation, Inc., is prohibited.

Throughout this manual, when necessary, we use notes to make you aware of safety considerations.



WARNING: Identifies information about practices or circumstances that can cause an explosion in a hazardous environment, which may lead to personal injury or death, property damage, or economic loss.



ATTENTION: Identifies information about practices or circumstances that can lead to personal injury or death, property damage, or economic loss. Attentions help you identify a hazard, avoid a hazard, and recognize the consequence



SHOCK HAZARD: Labels may be on or inside the equipment, for example, a drive or motor, to alert people that dangerous voltage may be present.



BURN HAZARD: Labels may be on or inside the equipment, for example, a drive or motor, to alert people that surfaces may reach dangerous temperatures.


IMPORTANT Identifies information that is critical for successful application and understanding of the product.

Allen-Bradley, CompactBlock, Connected Components Workbench, FactoryTalk, Micro800, Micro810, Micro820, Micro830, Micro850, Micro870, PowerFlex, Rockwell Automation, Rockwell Software, and TechConnect are trademarks of Rockwell Automation, Inc.

CIP, DeviceNet, and EtherNet/IP area trademarks of ODVA, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

Select a Micro800 Controller

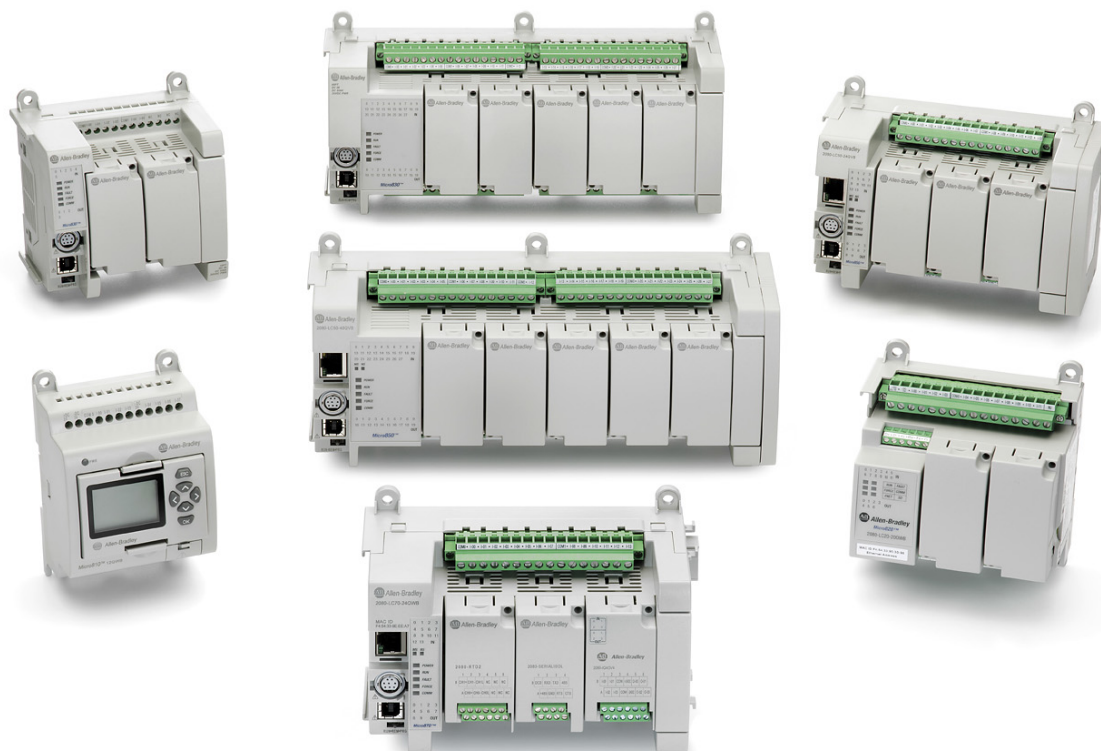

Micro800™ controllers are designed for low-cost, standalone machines. These economical small-size PLCs are available in different form factors based on the number of I/O points embedded in the base, with a range of features intended to address different requirements. The Micro800 family shares programming environment, accessories and plug-ins that allow machine builders to personalize the controller for specific capabilities.

Micro810® controllers function as a smart relay with high current relay outputs, but with the programming capabilities of a micro PLC. The Micro810 controllers come in a 12-point form factor.

Micro820® controllers are specifically designed for smaller standalone machines and remote automation projects. It has embedded Ethernet and serial ports and a microSD slot for datalogging and recipe management. These controllers come as 20-point form factors that can accommodate up to two plug-in modules. It also supports the Micro800 Remote LCD (2080-REMLCD) module to allow easier configuration of such settings as IP address and functions as a simple IP65 text display.


Micro830[®] controllers are designed for standalone machine control applications. They have flexible communications and I/O capabilities with up to five plug-ins. They come as a 10-, 16-, 24-, or 48-point form factors.

Micro850[®] expandable controllers are designed for applications that require more digital and analog I/O or higher performance analog I/O. They can support up to four expansion I/O. Micro850 controllers include additional communication connection options through an embedded 10/100 Base-T Ethernet port.

Micro870[®] controllers offer machine builders and end users a higher level of scalability, flexibility, and customization. Designed for large standalone machine applications, the Micro870 controller comes with great memory capacity to enable more modular program and use of user-defined function blocks.

Several Micro830, Micro850, and Micro870 controllers support basic positioning through embedded pulse train outputs (PTO). These controllers also allow you to configure up to six high speed counters (HSC), and choose from nine HSC operation modes. HSC is supported on all Micro830, Micro850, and Micro870 controller catalogs, except on 2080-LCxx-xxAWB. PTO is only supported on Micro830, Micro850, and Micro870 controller catalog numbers that end in BB or VB.

This selection guide serves to help you identify the right controller, plug-ins, expansion I/O, and accessories, based on your requirements.

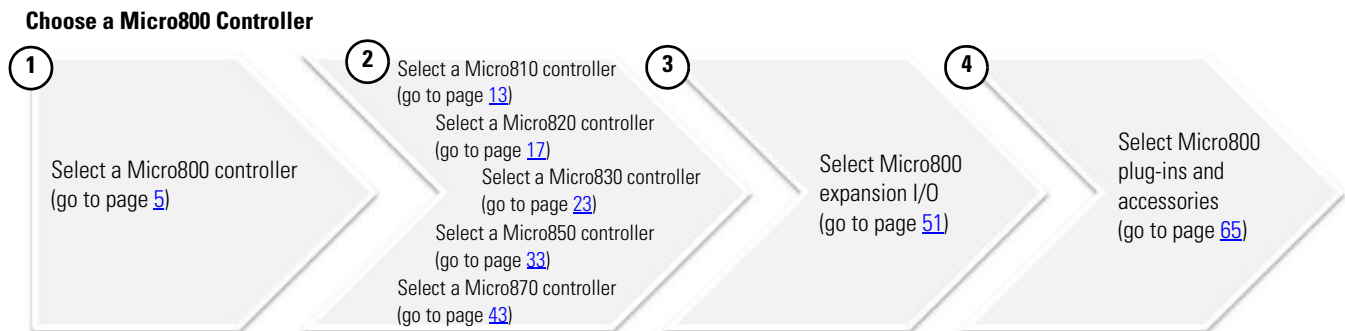

Micro800 Controllers Comparison

Feature Comparison

Attribute	Micro810	Micro820	Micro830				Micro850		Micro870
	12-point	20-point	10-point	16-point	24-point	48-point	24-point	48-point	24-point
Communication ports, embedded	USB 2.0 (with USB adapter)	10/100 Base T Ethernet port (RJ-45) RS232/RS485 non-isolated combo serial	USB 2.0 (non-isolated) RS232/RS485 non-isolated combo serial				USB 2.0 (non-isolated) RS232/RS485 non-isolated combo serial 10/100 Base T Ethernet port (RJ-45)		
Embedded digital I/O points ⁽¹⁾	12	19	10	16	24	48	24	48	24
Base analog I/O channels	Four 24V DC digital inputs are shared as 0...10V analog inputs (DC input models only)	One 0...10V analog output Four 24V DC digital inputs can be configured as 0...10V analog inputs (DC input models only) and via plug-in modules	Via plug-in modules				Via plug-in modules and expansion I/O		
Number of plug-in modules	0	2	2	2	3	5	3	5	3
Maximum digital I/O ⁽²⁾	12	35	26	32	48	88	132	192	304
Expansion I/O supported	—	—	—				All expansion I/O modules (see page 51)		
Types of accessories or plug-ins supported	<ul style="list-style-type: none"> LCD display with backup memory module USB adapter 	<ul style="list-style-type: none"> Micro800 Remote LCD (2080-REMLCD) All-plug-in modules (see page 65)⁽⁴⁾ 	All plug-in modules (see page 65) ⁽⁴⁾						
Power supply	Embedded 120/240V AC and 12/24V DC options	Base unit has embedded 24V DC power supply, optional external 120/240V AC power supply available							
Basic instruction speed	2.5 μ s per basic instruction	0.30 μ s per basic instruction							
Minimum scan/cycle time ⁽³⁾	<0.25 ms	<4 ms	<0.25 ms						
Software	Connected Components Workbench								

(1) See [Number and Types of Inputs/Outputs for Micro800 Catalogs on page 8](#).

(2) For Micro820 and Micro830 controllers, the number of maximum digital I/O assumes 8-point digital I/O plug-ins (for example, 2080-IQ40B4) are used on all available plug-in slots. For Micro850 and Micro870 controllers, the maximum number of digital I/O supported includes the base, plug-ins, and expansion I/O.

(3) Including reading and writing I/O, program execution, and communications overhead.

(4) 2080-MEMBAK-RTC is not supported on Micro820 and Micro870 controllers. 2080-MEMBAK-RTC2 is not supported on Micro820 controllers.

Micro800 Controller Programming Comparison (with Connected Components Workbench)

Attribute	Micro810 12-point	Micro820 20-point	Micro830 10/16-point	Micro830 24-point	Micro830 48-point	Micro850 24-point	Micro850 48-point	Micro870 24-point
Program steps ⁽¹⁾	2 K	10 K	4 K	10 K	10 K	10 K	10 K	20 K
Data bytes	2 KB	20 KB	8 KB	20 KB	20 KB	20 KB	20 KB	40 KB
IEC 61131-3 languages	Ladder diagram, function block diagram, structured text							
User defined function blocks	Yes							
Floating point	32-bit and 64-bit							
PID Loop Control	Yes (number limited only by memory)							
Embedded serial port protocols	None	Modbus RTU Master/Slave, ASCII/Binary, CIP Serial						

(1) Estimated Program and Data size are “typical” – program steps and variables are created dynamically. 1 Program Step = 12 data bytes. The number of bytes per instruction can vary greatly from program to program and from programming language to programming language.

Micro800 Communication Options

Controller	USB programming port	Embedded Serial Port, Serial Port Plug-In			Embedded Ethernet	
		CIP Serial	Modbus RTU	ASCII/Binary	EtherNet/IP	Modbus TCP
Micro810	Yes (with adapter)	No				
Micro820	Yes (with 2080-REMLCD)	Yes	Master/Slave	Yes	Yes	Yes
Micro830	Yes	Yes	Master/Slave	Yes	No	No
Micro850	Yes	Yes	Master/Slave	Yes	Yes	Yes
Micro870	Yes	Yes	Master/Slave	Yes	Yes	Yes

Micro800 Controllers Analog I/O and TC/RTD Comparison

Attribute	Micro810	Micro820	Micro800 (with plug-ins)	Micro850 (with expansion I/O)	Micro870 (with expansion I/O)
Performance level	LOW		MEDIUM	HIGH	
Isolation to controller (increased noise immunity)	None			Yes	
Resolution and Nominal Accuracy	Analog Input: 10-bit, 5% (2% with calibration)		Analog I/O: 12-bit, 1% TC/RTD: ± 1 °C CJC for TC: ± 1.2 °C	Analog Input: 14-bit input, $\pm 0.1\%$ Analog Output: 12-bit output, 0.133%, current, 0.425% voltage TC: $\pm 0.5 \dots \pm 3.0$ °C RTD: $\pm 0.2 \dots \pm 0.6$ °C	
Input update rate and filtering	Update rate only dependent on program scan, limited filtering		200 ms/ch, 50/60 Hz filtering	8 ms all channels with or without 50/60 Hz filtering	
Recommended maximum shielded cable length ⁽¹⁾	10 m			100 m	

(1) These numbers are guidelines only. Maximum cable length is dependent on the application and other factors such as cable type, installation, required accuracy, sensor, and so on.

Micro800 System Power Requirements⁽¹⁾

Controller/Module	Power Requirement, Max
Micro810 12-point (with or without LCD)	3 W 5V A – for 2080-LC10-12AWA only
Micro820 20-point without plug-ins with plug-ins	5.62 W 8.5 W
Micro830 10/16-point without plug-ins with plug-ins	5 W 7.88 W
Micro830 24-point without plug-ins with plug-ins	8 W 12.32 W
Micro830 48-point without plug-ins with plug-ins	11 W 18.2 W
Micro850 24-point without plug-ins/expansion I/O with plug-ins/expansion I/O	8 W 28 W
Micro850 48-point without plug-ins/expansion I/O with plug-ins/expansion I/O	11 W 33 W
Micro870 24-point without plug-ins/expansion I/O with plug-ins/expansion I/O	8 W 28 W
Plug-in modules, each	1.44 W
Expansion I/O (system bus power consumption)	2085-IQ16 – 0.85 W 2085-IQ32T – 0.95 W 2085-IA8 – 0.75 W 2085-IM8 – 0.75 W 2085-OA8 – 0.90 W 2085-OB16 – 1.00 W 2085-OV16 – 1.00 W 2085-OW8 – 1.80 W 2085-OW16 – 3.20 W 2085-IF4 – 1.70 W 2085-IF8 – 1.75 W 2085-OF4 – 3.70 W 2085-IRT4 – 2.00 W

(1) When setting up a Micro800 system, verify that total power consumption of the controller, plug-in and expansion I/O does not exceed the output power capacity of the power supply used. See [External Power Supply on page 75](#) for power supply specifications.

Number and Types of Inputs/Outputs


Number and Types of Inputs/Outputs for Micro800 Catalogs

Controller Family	Catalogs	Inputs				Outputs			Analog Out 0...10V DC	Analog In 0...10V (shared with DC In)	PTO/PWM Support ⁽¹⁾	Embedded HSC Support ⁽²⁾
		120V AC	120 / 240V AC	24V DC/ V AC	12V DC	Relay	24V DC Source	24V DC Sink				
Micro810	2080-LC10-12AWA	–	8	–	–	4	–	–	–	–	–	–
	2080-LC10-12QWB	–	–	8	–	4	–	–	–	4	–	–
	2080-LC10-12DWD	–	–	–	8	4	–	–	–	4	–	–
	2080-LC10-12QBB	–	–	8	–	–	4	–	–	4	–	–
Micro820	2080-LC20-20AWB	8	–	4	–	7	–	–	1	4	–	–
	2080-LC20-20AWBR	8	–	4	–	7	–	–	1	4	–	–
	2080-LC20-20QWB	–	–	12	–	7	–	–	1	4	–	–
	2080-LC20-20QWBR	–	–	12	–	7	–	–	1	4	–	–
	2080-LC20-20QBB	–	–	12	–	–	7	–	1	4	1 (PWM)	–
	2080-LC20-20QBRR	–	–	12	–	–	7	–	1	4	1 (PWM)	–
Micro830	2080-LC30-10QWB	–	–	6	–	4	–	–	–	–	–	2
	2080-LC30-10QVB	–	–	6	–	–	–	4	–	–	1 (PTO/PWM)	2
	2080-LC30-16AWB	10	–	–	–	6	–	–	–	–	–	–
	2080-LC30-16QWB	–	–	10	–	6	–	–	–	–	–	2
	2080-LC30-16QVB	–	–	10	–	–	–	6	–	–	1 (PTO/PWM)	2
	2080-LC30-24QWB	–	–	14	–	10	–	–	–	–	–	4
	2080-LC30-24QVB	–	–	14	–	–	–	10	–	–	2 (PTO/PWM)	4
	2080-LC30-24QBB	–	–	14	–	–	10	–	–	–	2 (PTO/PWM)	4
	2080-LC30-48AWB	28	–	–	–	20	–	–	–	–	–	–
	2080-LC30-48QWB	–	–	28	–	20	–	–	–	–	–	6
	2080-LC30-48QVB	–	–	28	–	–	–	20	–	–	3 (PTO/PWM)	6
2080-LC30-48QBB	–	–	28	–	–	20	–	–	–	3 (PTO/PWM)	6	
Micro850	2080-LC50-24AWB	14	–	–	–	10	–	–	–	–	–	–
	2080-LC50-24QWB	–	–	14	–	10	–	–	–	–	–	4
	2080-LC50-24QVB	–	–	14	–	–	–	10	–	–	2 (PTO/PWM)	4
	2080-LC50-24QBB	–	–	14	–	–	10	–	–	–	2 (PTO/PWM)	4
	2080-LC50-48AWB	28	–	–	–	20	–	–	–	–	–	–
	2080-LC50-48QWB	–	–	28	–	20	–	–	–	–	–	6
	2080-LC50-48QVB	–	–	28	–	–	–	20	–	–	3 (PTO/PWM)	6
	2080-LC50-48QBB	–	–	28	–	–	20	–	–	–	3 (PTO/PWM)	6
Micro870	2080-LC70-24AWB	14	–	–	–	10	–	–	–	–	–	–
	2080-LC70-24QWB	–	–	14	–	10	–	–	–	–	–	4
	2080-LC70-24QWBK	–	–	14	–	10	–	–	–	–	–	4
	2080-LC70-24QBB	–	–	14	–	–	10	–	–	–	2 (PTO/PWM)	4
	2080-LC70-24QBK	–	–	14	–	–	10	–	–	–	2 (PTO/PWM)	4

(1) For Micro830 and Micro850 controllers, you need firmware revision 6.011 or later to use PWM output.

(2) Maximum number of embedded HSC supported.

Micro800 Catalog Number Details

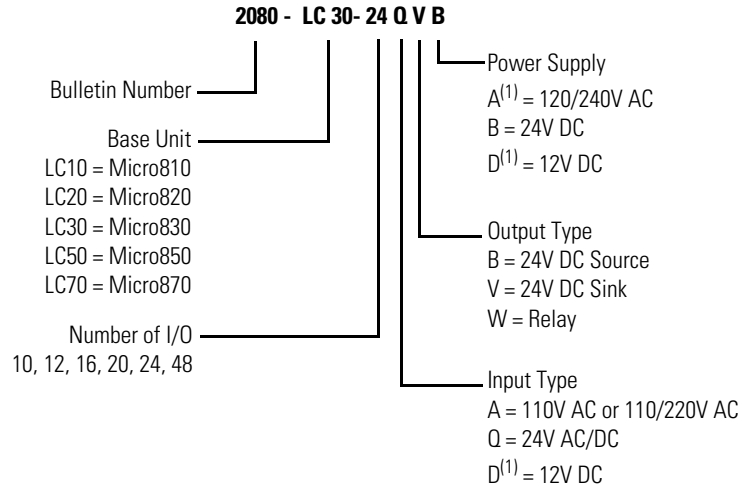

⁽¹⁾ Available for Micro810 only.

Connected Components Workbench Software

Connected Components Workbench™ is the programming and configuration software environment for the Micro800 controllers and our Connected Components products offering. It simplifies setup and usage, enabling applications ranging from simple Smart Relay up to Standalone Machine control.

Visit the website for the most up-to-date product information, downloads and tools at <https://rok.auto/ccw>.

Standard Edition

Attribute	Basic
Delivery	Download Connected Components Workbench Standard Edition for FREE.
Packaging options	Order the DVD from the Connected Components Workbench web page.
Features	<ul style="list-style-type: none"> • LD, FBD and ST editors • User-defined function blocks and functions • No activation needed • Optional registration during installation (for product updates and notices) • Demo version of Micro800 Simulator (10 mins in run mode) • Trend of local and global variables

Developer Edition

The Developer Edition offers the following additional programming features:

User-defined Structures

- You can combine different data types to create structures and then assign them to user-defined variables.
- Structures are useful when you want a single variable to hold several related pieces of information. For example, you might want to define a structure to keep temperature ranges and alarm levels for a device rather than creating multiple variables.

Spy Lists

You can define spy lists to monitor changes in variables and function block instances in Connected Components Workbench programs.

Note: The Developer Edition requires an activation key. See the FactoryTalk Activation help for additional information on activating Rockwell Automation software products.

Micro800 Simulator

Develop and test code without the need for hardware. Includes EtherNet/IP communications and virtual I/O wiring.

Archive Manager

Take snapshots of your project with timestamp and description. Restore previous snapshots.

For More Information

Visit the Micro800 website at <https://ab.rockwellautomation.com/Programmable-Controllers/Micro800> to learn more about Micro800 products and download Connected Component Workbench software and Micro800 firmware updates.

If you would like a manual, you can:

- download a free electronic version from the Internet: <https://rockwellautomation.com/literature>.
- purchase a printed manual by contacting your local Allen-Bradley distributor or Rockwell Automation representative.

You can also visit the following websites for additional technical information:

- **Sample Code Library**
<https://www.rockwellautomation.com/global/sample-code/overview.page>
- **Technical Support**
<https://rockwellautomation.custhelp.com/>

Additional Resources

These documents contain additional information concerning related Rockwell Automation products.

Resource	Description
Micro810 Programmable Controllers User Manual, publication 2080-UM001	A more detailed description of how to install and use your Micro810 programmable controller.
Micro820 Programmable Controllers User Manual, publication 2080-UM005	A more detailed description of how to install and use your Micro820 programmable controllers.
Micro830, Micro850, and Micro870 Programmable Controllers User Manual, publication 2080-UM002	A more detailed description of how to install and use your Micro830, Micro850, and Micro870 programmable controller.
Micro800 Expansion I/O Modules User Manual, publication 2080-UM003	Description of features, installation, wiring, and specifications for the Micro800 expansion I/O modules and accessories.
Micro800 Plug-in Modules User Manual, publication 2080-UM004	Description of features, installation, wiring, and specifications for the Micro800 plug-in modules.
Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1	Provides general guidelines for installing a Rockwell Automation industrial system.
Product Certifications website, https://www.rockwellautomation.com/global/certification/overview.page	Provides declarations of conformity, certificates, and other certification details.

Notes:

Select a Micro810 Controller



As the smallest of the Micro800 family, the Micro810 controller is available in a 12-point version, with two 8 A and two 4 A outputs that eliminate the need for external relays. The Micro810 controller features embedded smart relay function blocks that can be configured from a 1.5" LCD and keypad. The function blocks include Delay OFF/ON Timer, Time of Day, Time of Week and Time of Year for applications requiring a programmable timer and lighting control. Programming can also be done through a program download via USB programming port, using Connected Components Workbench software.

To help you select a Micro810 controller, consult the specifications for each catalog in the next section.

Micro810 Controllers – Number and Types of Inputs and Outputs

Catalog Number	Power	Inputs			Outputs		Analog In 0...10V (shared with DC In)
		120V AC	240V AC	12...24V DC/ V AC	Relay	24 V DC Source	
2080-LC10-12AWA	120...240V AC	8		–	4	–	–
2080-LC10-12QWB	24V DC	–	–	8	4	–	4
2080-LC10-12DWD	12V DC	–	–	8	4	–	4
2080-LC10-12QBB	12...24V DC	–	–	8	–	4	4

For more information, see the Micro810 Programmable Controllers User Manual, publication [2080-UM001](#).

Specifications

General Specifications

Attribute	2080-LC10-12AWA	2080-LC10-12QWB	2080-LC10-12DWD	2080-LC10-12QBB
Number of I/O	8 Input (4 digital, 4 analog/digital, configurable) 4 Output			
Dimensions (HxWxD)	91 x 75 x 59 mm (3.58 x 2.95 x 2.32 in.)			
Shipping weight, approx.	0.203 kg (0.448 lb)			
Wire size	Min		Max	
	Solid	0.32 mm ² (22 AWG)	2.1 mm ² (14 AWG)	Rated @ 90 °C (194 °F) insulation max
	Stranded	0.32 mm ² (22 AWG)	1.3 mm ² (16 AWG)	
Wiring category	2 – on signal ports 2 – on power ports			
Wire type	use copper conductors only			
Terminal screw torque	1.085 Nm (8 lb-in.)			
Supply voltage range	85...263V DC	20.4...26.4V DC	10.8V...13.2V DC	11.4V..26.4V DC
Supply frequency range (AC supply)	47...63 Hz	–		
Voltage range	100...240V AC, 50/60 Hz	24V DC Class 2	12V DC Class 2	12/24V DC Class 2
Power consumption, max	5V A	3 W		
I/O rating	Input: 120...240V AC	Input: 24V DC, 8 mA	Input: 12V DC, 8 mA	Input: 24V DC, 8 mA
	Output: Relay 00 & 01: 8 A @ 240V AC, B300, R300, General Use Relay 02 & 03: 4 A @ 240V AC, C300, R150, General Use			Output: 24V DC 1A, 25 °C, 24V DC 0.5A 55 °C
Fuse, type	Rated 250V 3.15 A-RADIAL			
AC input filter setting	16 ms for all embedded inputs (In Connected Components Workbench, go to the Embedded I/O configuration window to re-configure the filter setting for each input group)			
Isolation voltage	250V (continuous), Reinforced Insulation Type, I/O to Aux and Network, Inputs to Outputs. Type tested for 60 s 3250V DC, I/O to Aux and Network, Inputs to Outputs	250V (continuous), Reinforced Insulation Type, I/O to Aux and Network, Inputs to Outputs Type tested for 60 s @ 720V DC, Inputs to Aux and Network, 3250V DC Outputs to Aux and Network, Inputs to Outputs		50V (continuous), Reinforced Insulation Type, I/O to Aux and Network, Inputs to Outputs Type tested for 60 s @ 720V DC, I/O to Aux and Network, Inputs to Outputs
Insulation stripping length	7 mm (0.28 in.)			
Enclosure type rating	Meets IP20			
North American temp code	T5			



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Environmental Specifications

Environmental Specifications

Attribute	Value
Temperature, operating	IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock): 0...55 °C (32...131 °F)
Temperature, surrounding air, max	55 °C (131 °F)
Temperature, storage	IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock): -40...85 °C (-40...185 °F)
Relative humidity	IEC 60068-2-30 (Test Db, Unpackaged Damp Heat): 5...95% non-condensing
Vibration	IEC 60068-2-6 (Test Fc, Operating): 2 g @ 10...500 Hz
Shock, operating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): 30 g
Shock, nonoperating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): DIN rail mount: 30 g Panel mount: 30 g
Emissions	IEC 61000-6-4
ESD immunity	IEC 61000-4-2: 4 kV contact discharges 8 kV air discharges
Radiated RF immunity	IEC 61000-4-3: 10V/m with 1 kHz sine-wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity	IEC 61000-4-4: ±2 kV @ 5 kHz on power ports ±2 kV @ 5 kHz on signal ports
Surge transient immunity	IEC 61000-4-5: ±1 kV line-line(DM) and ±2 kV line-earth(CM) on power ports ±1 kV line-line(DM) and ±2 kV line-earth(CM) on signal ports ±2 kV line-earth(CM) on shielded ports
Conducted RF immunity	IEC 61000-4-6: 10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz
Voltage variation	IEC 61000-4-11: 60% dip for 5 and 50 periods on AC supply ports 30% dip for 0.5 period @ 0° and 180° on AC supply ports 100% dip for 0.5 period @ 0° and 180° on AC supply ports ±10% fluctuations for 15 min on AC supply ports > 95% interruptions for 250 periods on AC supply ports


Certifications

Certifications

Certification (when product is marked) ⁽¹⁾	Value
c-UL-us	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.
CE	European Union 2014/30/EU EMC Directive, compliant with: EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) European Union 2011/65/EU RoHS, compliant with: EN 50581; Technical Documentation
RCM	Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions
EAC	Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation

(1) See the Product Certification link at <http://www.rockwellautomation.com/global/certification/overview.page> for Declaration of Conformity, Certificates, and other certification details.

Select a Micro820 Controller

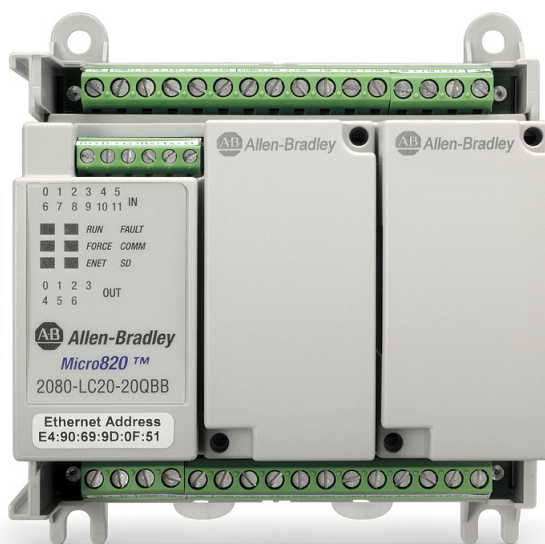

As one of the smaller controllers in the Micro800 family, the Micro820 controller comes as a 20-point form factor, with six catalogs available for selection. The Micro820 controller is designed for smaller standalone machines and remote automation projects.

It has the following features:

- Two plug-in module slots
- microSD card slot for project backup and restore, datalogging and recipe
- Embedded 10/100 Base-t Ethernet port(RJ-45)
- Support for Remote LCD module (2080-REMLCD) for configuration
- Embedded non-isolated RS232/RS485 combo serial port
- Modbus RTU protocol (serial port)
- Modbus TCP support
- EtherNet/IP™ support
- CIP™ Serial support

To help you select a Micro820 controller, consult the specifications for each catalog in the next section.

Micro820 Controllers – Number and Types of Inputs and Outputs

Catalog Number	Inputs			Outputs			Analog Out 0...10V DC	Analog In 0...10V (shared with DC In)	PWM Support
	120V AC	120/240V AC	24V DC	Relay	24V DC Source	24V DC Sink			
2080-LC20-20AWB	8	–	4	7	–	–	1	4	–
2080-LC20-20AWBR	8	–	4	7	–	–	1	4	–
2080-LC20-20QWB	–	–	12	7	–	–	1	4	–
2080-LC20-20QWBR	–	–	12	7	–	–	1	4	–
2080-LC20-20QBB	–	–	12	–	7	–	1	4	1
2080-LC20-20QBRR	–	–	12	–	7	–	1	4	1

For more information, see the Micro820 Programmable Controllers User Manual, publication [2080-UM005](#).

Specifications

General Specifications

Attribute	2080-LC20-20AWB, 2080-LC20-20AWBR	2080-LC20-20QWB, 2080-LC20-20QWBR	2080-LC20-20QBB, 2080-LC20-20QBRR	
Number of I/O	20 (12 inputs, 8 outputs)			
Dimension (HxWxD)	90 x 104 x 75 mm (3.54 x 4.09 x 2.95 in.)			
Shipping weight, approx.	0.38 kg (0.83 lb)			
Wire size	For fixed terminal blocks:			
		Min	Max	Rated @ 90 °C (194 °F) insulation max
	Solid	0.14 mm ² (26 AWG)	2.5 mm ² (14 AWG)	
	Stranded	0.14 mm ² (26 AWG)	1.5 mm ² (16 AWG)	
	For removable terminal blocks:			Rated @ 90 °C (194 °F) insulation max
		Min	Max	
	Solid and Stranded	0.2 mm ² (24 AWG)	2.5 mm ² (14 AWG)	
	For RS232/RS485 serial port:			Rated @ 90 °C (194 °F) insulation max
		Min	Max	
	Solid	0.14 mm ² (26 AWG)	1.5 mm ² (16 AWG)	
Stranded	0.14 mm ² (26 AWG)	1.0 mm ² (18 AWG)		
Wiring category ⁽¹⁾	2 – on signal ports 2 – on power ports 2 – on communication ports			
Wire type	Use copper conductors or shielded cables			

General Specifications

Attribute	2080-LC20-20AWB, 2080-LC20-20AWBR	2080-LC20-20QWB, 2080-LC20-20QWBR	2080-LC20-20QBB, 2080-LC20-20QBRR
Terminal screw torque	For removable and fixed terminal blocks: 0.5...0.6 Nm (4.4...5.3 lb-in.) using a 0.6 x 3.5 mm flat-blade screwdriver. Note: Use a handheld screwdriver to hold down the screws at the side. For RS232/RS485 serial port: 0.22...0.25 Nm (1.95...2.21 lb-in.) using 0.4 x 2.5 x 80 mm 2-component grip with non-slip grip screwdriver.		
Input circuit type	120V AC – for Inputs 4...11 only	24V DC sink/source (standard)	
Output circuit type	Relay		24V DC source (standard and high-speed)
Power input	24V DC		
Power consumption, max	5.62 W – without plug-in modules 8.5 W – with plug-in modules		
Power dissipation, max	6 W		
Power supply voltage range	20.4...26.4 V DC, Class 2		
Auxiliary power supply output for thermistor	10V		
I/O rating	Input: 120V AC 16 mA Output: 2 A, 240V AC 2 A, 24V DC	Input: 24V DC, 8.8 mA Output: 2 A, 240V AC 2 A, 24V DC	Input: 24V DC, 8.8 mA Output: 24V DC, 1 A per point (Surrounding air temperature 30°C) 24V DC, 0.3 A per point (Surrounding air temperature 65 °C)
Isolation voltage	250V (continuous), Reinforced Insulation Type, Output to Aux and Network, Inputs to Outputs. 150V (continuous), Reinforced Insulation Type, Input to Aux and Network. Type tested for 60 s @ 3250V DC Output to Aux and Network, Inputs to Outputs. Type tested for 60 s @ 1950V DC Input to Aux and Network.	250V (continuous), Reinforced Insulation Type, Output to Aux and Network, Inputs to Outputs. 50V (continuous), Reinforced Insulation Type, Input to Aux and Network. Type tested for 60 s @ 720V DC, Inputs to Aux and Network, 3250V DC Outputs to Aux and Network, Inputs to Outputs.	50V (continuous), Reinforced Insulation Type, I/O to Aux and Network, Inputs to Outputs. Type tested for 60 s @ 720V DC, I/O to Aux and Network, Inputs to Outputs.
Pilot duty rating	C300, R150		–
Insulation stripping length	7 mm for the removable and fixed terminal blocks 5 mm for the RS232/RS485 serial port		
Enclosure type rating	Meets IP20		
North American temp code	T4		

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Environmental Specifications

Environmental Specifications

Attribute	Value
Temperature, operating	IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock): -20...65 °C (-4...149 °F)
Temperature, surrounding air, max	65 °C (149 °F)
Temperature, nonoperating	IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock): -40...85 °C (-40...185 °F)
Relative humidity	IEC 60068-2-30 (Test Db, Unpackaged Damp Heat): 5...95% non-condensing
Vibration	IEC 60068-2-6 (Test Fc, Operating): 2 g @ 10...500 Hz
Shock, operating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): 25 g
Shock, nonoperating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): DIN mount: 25 g PANEL mount: 45 g
Emissions	IEC 61000-6-4
ESD immunity	IEC 61000-4-2: 6 kV contact discharges 8 kV air discharges
Radiated RF immunity	IEC 61000-4-3: 10V/m with 1 kHz sine-wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 10V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity	IEC 61000-4-4: ±2 kV @ 5 kHz on power ports ±2 kV @ 5 kHz on signal ports ±1 kV @ 5 kHz on communication ports
Surge transient immunity	IEC 61000-4-5: ±1 kV line-line(DM) and ±2 kV line-earth(CM) on signal ports ±1 kV line-earth(CM) on communication ports
Conducted RF immunity	IEC 61000-4-6: 10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz

Certifications


Certifications

Certification (when product is marked)⁽¹⁾	Value
c-UL-us	<p>UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.</p> <p>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.</p>
CE	<p>European Union 2014/30/EU EMC Directive, compliant with: EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)</p> <p>European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11)</p> <p>European Union 2011/65/EU RoHS, compliant with: EN 50581; Technical Documentation</p>
RCM	Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3
EAC	Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation
EtherNet/IP	ODVA conformance tested to EtherNet/IP specifications

(1) See the Product Certification link at <http://www.rockwellautomation.com/global/certification/overview.page> for Declaration of Conformity, Certificates, and other certification details.

Notes:

Select a Micro830 Controller

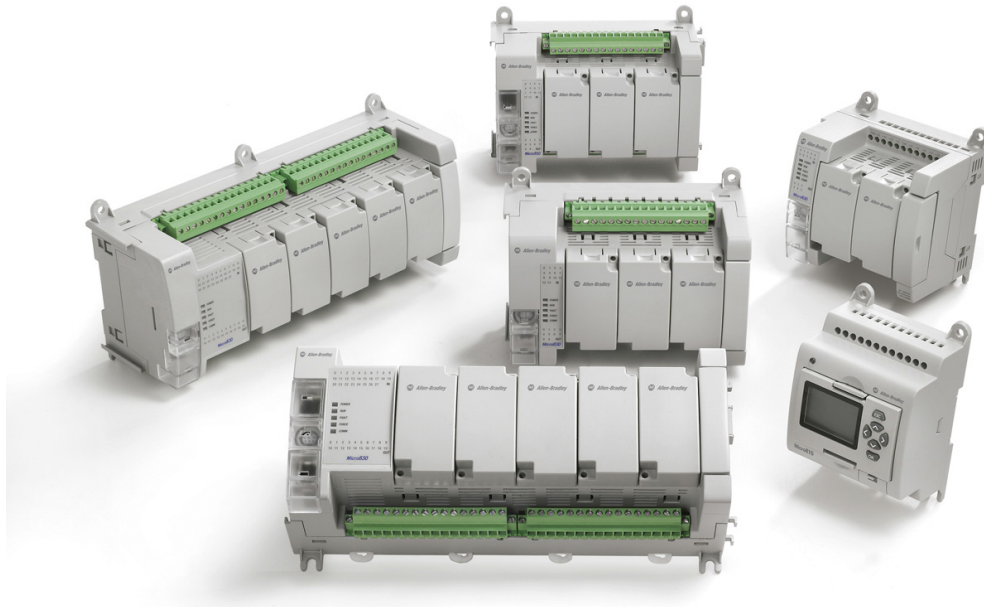

The Micro830 controller allows integration of as many as five plug-in modules. The plug-in modules enable machine builders to personalize the controllers to increase functionality. Most models offer removable terminal blocks and simplified communication via serial port.

The controllers include:

- up to six embedded High-Speed Counter inputs (HSC)⁽¹⁾
- 100 kHz speed HSC available on 24V DC models
- up to three embedded Pulse Train Outputs (PTO) for basic positioning⁽²⁾
- High speed input interrupts
- Modbus RTU protocol (serial port)
- CIP Serial to allow tighter integration with PanelView Component
- Embedded USB programming and serial port (RS232/RS485)
- Plug-in slots to customize according to needs

To help you select a Micro830 controller, check out the specifications for each catalog in the next section.

(1) Embedded HSC is supported on all Micro830 catalog numbers, except on 2080-LC30-xxAWB.

(2) PTO is supported on Micro830 catalog numbers ending in BB or VB only.

Micro830 Controllers – Number and Types of Inputs and Outputs

Catalog Number	Inputs		Outputs			PTO/PWM Support	HSC Support ⁽¹⁾
	120V AC	24V DC/V AC	Relay	24V DC Source	24V DC Sink		
2080-LC30-10QWB	–	6	4	–	–	–	2
2080-LC30-10QVB	–	6	–	–	4	1	2
2080-LC30-16AWB	10	–	6	–	–	–	–
2080-LC30-16QWB	–	10	6	–	–	–	2
2080-LC30-16QVB	–	10	–	–	6	1	2
2080-LC30-24QWB	–	14	10	–	–	–	4
2080-LC30-24QVB	–	14	–	–	10	2	4
2080-LC30-24QBB	–	14	–	10	–	2	4
2080-LC30-48AWB	28	–	20	–	–	–	–
2080-LC30-48QWB	–	28	20	–	–	–	6
2080-LC30-48QVB	–	28	–	–	20	3	6
2080-LC30-48QBB	–	28	–	20	–	3	6

(1) Maximum number of HSC supported.

For more information, see the Micro830, Micro850, and Micro870 Programmable Controllers User Manual, publication [2080-UM002](#).

Micro830 10-Point Controllers



General Specifications – Micro830 10-Point Controllers

Attribute	2080-LC30-10QWB	2080-LC30-10QVB
Number of I/O	10 (6 inputs, 4 outputs)	
Dimensions (HxWxD)	90 x 100 x 80 mm (3.54 x 3.94 x 3.15 in.)	
Shipping weight, approx.	0.302 kg (0.666 lb)	

General Specifications – Micro830 10-Point Controllers

Attribute	2080-LC30-10QWB	2080-LC30-10QVB		
Wire size		Min	Max	Rated @ 90 °C (194 °F) insulation max
	Solid	0.14 mm ² (26 AWG)	2.5 mm ² (14 AWG)	
	Stranded	0.14 mm ² (26 AWG)	1.5 mm ² (16 AWG)	
Wiring category ⁽¹⁾	2 – on signal ports 2 – on power ports			
Wire type	Use copper conductors only			
Terminal screw torque	0.6 Nm (4.4 lb-in.) using a 2.5 mm (0.10 in.) flat-blade screwdriver			
Input circuit type	12/24V sink/source (standard) 24V sink/source (high-speed)			
Output circuit type	Relay	24V DC sink transistor standard and high-speed		
Power consumption, max	5 W – without plug-in modules 7.88 W – with plug-in modules			
Power supply voltage range	20.4...26.4V DC Class 2			
I/O rating	Input: 24V DC, 8.8 mA Output: 2 A, 240V AC, general use		Input: 24V DC, 8.8 mA Output: 2 A, 24V DC, 1 A per point (Surrounding air temperature 30 °C) 24V DC, 0.3 A per point (Surrounding air temperature 65 °C)	
Isolation voltage	250V (continuous), Reinforced Insulation Type, Outputs to Aux and Network, Inputs to Outputs Type tested for 60 s @ 720V DC, Inputs to Aux and Network, 3250V DC Outputs to Aux and Network, Inputs to Outputs		50V (continuous), Reinforced Insulation Type, I/O to Aux and Network, Inputs to Outputs Type tested for 60 s @ 720V DC, I/O to Aux and Network, Inputs to Outputs	
Pilot duty rating	C300, R150		—	
Insulation stripping length	7 mm (0.28 in.)			
Enclosure type rating	Meets IP20			
North American temp code	T4			

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Micro830 16-Point Controllers



General Specifications – Micro830 16-Point Controllers

Attribute	2080-LC30-16AWB	2080-LC30-16QWB	2080-LC30-16QVB	
Number of I/O	16 (10 inputs, 6 outputs)			
Dimensions (HxWxD)	90 x 100 x 80 mm (3.54 x 3.94 x 3.15 in.)			
Shipping weight, approx.	0.302 kg (0.666 lb)			
Wire size		Min	Max	
	Solid	0.14 mm ² (26 AWG)	2.5 mm ² (14 AWG)	Rated @ 90 °C (194 °F) insulation max
	Stranded	0.14 mm ² (26 AWG)	1.5 mm ² (16 AWG)	
Wiring category ⁽¹⁾	2 – on signal ports 2 – on power ports			
Wire type	Use copper conductors only			
Terminal screw torque	0.6 Nm (4.4 lb-in.) using a 2.5 mm (0.10 in.) flat-blade screwdriver			
Input circuit type	120V AC	12/24V sink/source (standard) 24V sink/source (high-speed)		
Output circuit type	Relay		12/24V DC sink transistor standard and high-speed	
Power consumption, max	5 W – without plug-in modules 7.88 W – with plug-in modules			
Power supply voltage range	20.4...26.4V DC Class 2			
I/O rating	Input: 120V AC, 16 mA Output: 2 A, 240V AC, general use	Input: 24V DC, 8.8 mA Output: 2 A, 240V AC, general use	Input: 24V DC, 8.8 mA Output: 24V DC, 1 A per point (Surrounding air temperature 30 °C) 24V DC, 0.3 A per point (Surrounding air temperature 65 °C)	

General Specifications – Micro830 16-Point Controllers

Attribute	2080-LC30-16AWB	2080-LC30-16QWB	2080-LC30-16QVB
Isolation voltage	250V (continuous), Reinforced Insulation Type, Outputs to Aux and Network, Inputs to Outputs 2080-LC30-16AWB: Type tested for 60 s @ 3250V DC I/O to Aux and Network, Inputs to Outputs 2080-LC30-16QWB: Type tested for 60 s @ 720V DC, Inputs to Aux and Network, 3250V DC Outputs to Aux and Network, Inputs to Outputs		50V (continuous), Reinforced Insulation Type, I/O to Aux and Network, Inputs to Outputs Type tested for 60s @ 720V DC, I/O to Aux and Network, Inputs to Outputs
Pilot duty rating	C300, R150		—
Insulation stripping length	7 mm (0.28 in.)		
Enclosure type rating	Meets IP20		
North American temp code	T4		

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Micro830 24-Point Controllers

General Specifications – Micro830 24-Point Controllers


Attribute	2080-LC30-24QWB	2080-LC30-24QVB	2080-LC30-24QBB
Number of I/O	24 (14 inputs, 10 outputs)		
Dimensions (HxWxD)	90 x 150 x 80 mm (3.54 x 5.91 x 3.15 in.)		
Shipping weight, approx.	0.423 kg (0.933 lb)		
Wire size		Min	Max
	Solid and stranded	0.14 mm ² (26 AWG)	2.5 mm ² (14 AWG)
Wiring category ⁽¹⁾	2 – on signal ports 2 – on power ports		
Wire type	Use copper conductors only		
Terminal screw torque	0.6 Nm (4.4 lb-in.) using a 2.5 mm (0.10 in.) flat-blade screwdriver		
Input circuit type	12/24V sink/source (standard) 24V DC sink/source (standard and high-speed)		

General Specifications – Micro830 24-Point Controllers

Attribute	2080-LC30-24QWB	2080-LC30-24QVB	2080-LC30-24QBB
Output circuit type	Relay	24V DC sink (standard and high-speed)	24V DC source (standard and high-speed)
Power consumption, max	8 W – without plug-in modules 12.32 W – with plug-in modules		
Power supply voltage range	20.4...26.4V DC Class 2		
I/O rating	Input: 24V DC, 8.8 mA Output: 2 A, 240V AC, general use	Input: 24V DC, 8.8 mA Output: 24V DC, Class 2, 1 A per point (Surrounding air temperature 30 °C) 24V DC, Class 2, 0.3 A per point (Surrounding air temperature 65 °C)	
Isolation voltage	250V (continuous), Reinforced Insulation Type, Outputs to Aux and Network, Inputs to Outputs Type tested for 60 s @ 720V DC, Inputs to Aux and Network, 3250V DC Outputs to Aux and Network, Inputs to Outputs	50V (continuous), Reinforced Insulation Type, I/O to Aux and Network, Inputs to Outputs Type tested for 60 s @ 720V DC, I/O to Aux and Network, Inputs to Outputs	
Pilot duty rating	C300, R150	—	
Insulation stripping length	7 mm (0.28 in.)		
Enclosure type rating	Meets IP20		
North American temp code	T4		

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Micro830 48-Point Controllers

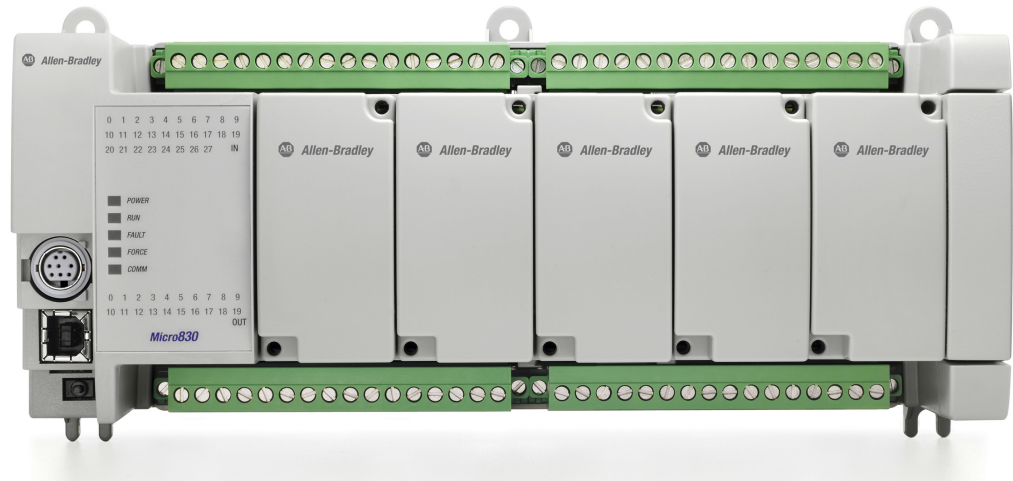

General Specifications – Micro830 48-Point Controllers

Attribute	2080-LC30-48AWB	2080-LC30-48QWB	2080-LC30-48QVB	2080-LC30-48QBB
Number of I/O	48 (28 inputs, 20 outputs)			
Dimensions (HxWxD)	90 x 230 x 80 mm (3.54 x 9.06 x 3.15 in.)			
Shipping weight, approx.	0.725 kg (1.60 lb)			

General Specifications – Micro830 48-Point Controllers

Attribute	2080-LC30-48AWB	2080-LC30-48QWB	2080-LC30-48QVB	2080-LC30-48QBB
Wire size		Min	Max	
	Solid and stranded	0.14 mm ² (26 AWG)	2.5 mm ² (14 AWG)	Rated @ 90 °C (194 °F) insulation max
Wiring category ⁽¹⁾	2 – on signal ports 2 – on power ports			
Wire type	Use copper conductors only			
Terminal screw torque	0.6 Nm (4.4 lb-in.) using a 2.5 mm (0.10 in.) flat-blade screwdriver			
Input circuit type	120V AC	24V DC sink/source (standard and high-speed)		
Output circuit type	Relay		24V DC sink (standard and high-speed)	24V DC source (standard and high-speed)
Power consumption, max	11 W – without plug-in modules 18.2 W – with plug-in modules			
Power supply voltage range	20.4...26.4V DC Class 2			
I/O rating	Input: 120V AC, 16 mA Output: 2 A, 240V AC, general use	Input: 24V DC, 8.8 mA Output: 2 A, 240V AC, general use	Input: 24V DC, 8.8 mA Output: 24V DC, 1 A per point (Surrounding air temperature 30 °C) 24V DC, 0.3 A per point (Surrounding air temperature 65 °C)	
Isolation voltage	250V (continuous), Reinforced Insulation Type, Outputs to Aux and Network, Inputs to Outputs Type tested for 60 s @ 3250V DC I/O to Aux and Network, Inputs to Outputs	250V (continuous), Reinforced Insulation Type, Outputs to Aux and Network, Inputs to Outputs Type tested for 60 s @ 720V DC, Inputs to Aux and Network, 3250V DC Outputs to Aux and Network, Inputs to Outputs	50V (continuous), Reinforced Insulation Type, I/O to Aux and Network, Inputs to Outputs Type tested for 60 s @ 720V DC, I/O to Aux and Network, Inputs to Outputs	
Pilot duty rating	C300, R150		—	
Insulation stripping length	7 mm (0.28 in.)			
Enclosure type rating	Meets IP20			
North American temp code	T4			

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Environmental Specifications

Environmental Specifications

Attribute	Value
Temperature, operating	IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock): -20...65 °C (-4...149 °F)
Temperature, surrounding air, max	65 °C (149 °F)
Temperature, nonoperating	IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock): -40...85 °C (-40...185 °F)
Relative humidity	IEC 60068-2-30 (Test Db, Unpackaged Damp Heat): 5...95% non-condensing
Vibration	IEC 60068-2-6 (Test Fc, Operating): 2 g @ 10...500 Hz
Shock, operating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): 25 g
Shock, nonoperating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): DIN mount: 25 g PANEL mount: 35 g – 24-point and 48-point controllers 45 g – 10-point and 16-point controllers
Emissions	IEC 61000-6-4
ESD immunity	IEC 61000-4-2: 6 kV contact discharges 8 kV air discharges
Radiated RF immunity	IEC 61000-4-3: 10V/m with 1 kHz sine-wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 10V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity	IEC 61000-4-4: ±2 kV @ 5 kHz on power ports ±2 kV @ 5 kHz on signal ports
Surge transient immunity	IEC 61000-4-5: ±1 kV line-line(DM) and ±2 kV line-earth(CM) on signal ports
Conducted RF immunity	IEC 61000-4-6: 10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz

Certifications


Certifications

Certification (when product is marked)⁽¹⁾	Value
c-UL-us	<p>UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.</p> <p>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.</p>
CE	<p>European Union 2014/30/EU EMC Directive, compliant with: EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)</p> <p>European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11)</p> <p>European Union 2011/65/EU RoHS, compliant with: EN 50581; Technical Documentation</p>
RCM	<p>Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions</p>
KC	<p>Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3</p>
EAC	<p>Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation</p>

(1) See the Product Certification link at <http://www.rockwellautomation.com/global/certification/overview.page> for Declaration of Conformity, Certificates, and other certification details.

Notes:

Select a Micro850 Controller

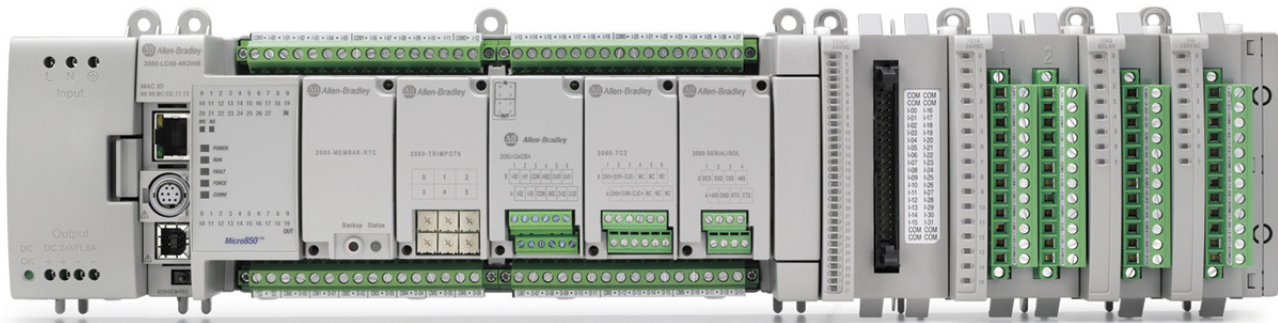

A Micro850 controller with a power supply, plug-in modules, and four expansion I/O modules attached

Micro850 controllers are suitable for applications that require more digital and analog I/O or higher performance analog I/O. These controllers can support up to four expansion I/O. It comes in a 24-point and 48-point form factor with an embedded Ethernet port.

Micro850 controllers include:

- Expansion I/O support
- up to six embedded High-Speed Counter inputs (HSC)⁽¹⁾
- 100 kHz speed HSC available on 24V DC models
- up to three embedded Pulse Train Outputs (PTO)⁽²⁾ for basic positioning
- High speed input interrupts
- Modbus RTU protocol (serial port)
- Modbus/TCP support
- EtherNet/IP support
- CIP Serial support
- Embedded USB programming and serial port (RS232/485)
- Embedded 10/100 Base-T Ethernet port (RJ45)
- Plug-in slots to customize according to needs

To help you select a Micro850 controller, see the following specifications.

(1) Embedded HSC is supported on all Micro850 catalog numbers, except on 2080-LC50-xxAWB.

(2) PTO is supported on Micro850 catalog numbers ending in BB or VB.


Micro850 Controllers – Number and Types of Inputs and Outputs

Catalog Number	Inputs		Outputs			PTO/PWM Support	HSC Support ⁽¹⁾
	120V AC	24V DC/V AC	Relay	24V DC Source	24V DC Sink		
2080-LC50-24AWB	14	–	10	–	–	–	–
2080-LC50-24QWB	–	14	10	–	–	–	4
2080-LC50-24QVB	–	14	–	–	10	2	4
2080-LC50-24QBB	–	14	–	10	–	2	4
2080-LC50-48AWB	28	–	20	–	–	–	–
2080-LC50-48QWB	–	28	20	–	–	–	6
2080-LC50-48QVB	–	28	–	–	20	3	6
2080-LC50-48QBB	–	28	–	20	–	3	6

(1) Maximum number of HSC supported.

For more information, see the Micro830, Micro850, and Micro870 Programmable Controllers User Manual, publication [2080-UM002](#).

Micro850 24-Point Controllers

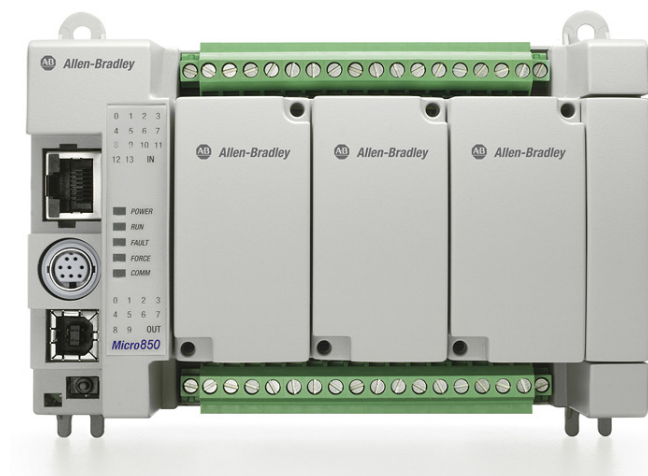

General Specifications – Micro850 24-Point Controllers

Attribute	2080-LC50-24AWB	2080-LC50-24QWB	2080-LC50-24QVB	2080-LC50-24QBB
Number of I/O	24 (14 inputs, 10 outputs)			
Dimensions (HxWxD)	90 x 158 x 80 mm (3.54 x 6.22 x 3.15 in.)			
Shipping weight, approx.	0.423 kg (0.933 lb)			
Wire size		Min	Max	
	Solid and Stranded	0.2 mm ² (24 AWG)	2.5 mm ² (14 AWG)	Rated @ 90 °C (194 °F) insulation max
Wiring category ⁽¹⁾	2 – on signal ports 2 – on power ports 2 – on communication ports			

General Specifications – Micro850 24-Point Controllers

Attribute	2080-LC50-24AWB	2080-LC50-24QWB	2080-LC50-24QVB	2080-LC50-24QBB
Wire type	Use copper conductors only			
Terminal screw torque	0.4...0.5 Nm (3.5...4.4 lb-in.) using a 0.6 x 3.5 mm flat-blade screwdriver. (Note: Use a handheld screwdriver to hold down the screws at the side.)			
Input circuit type	120V AC	12/24V sink/source (standard) 24V sink/source (high-speed)		
Output circuit type	Relay		24V DC sink (standard and high-speed)	24V DC source (standard and high-speed)
Power consumption, max	8 W – without plug-in modules and expansion I/O modules 28 W – with plug-in modules and expansion I/O modules			
Power supply voltage range	20.4...26.4V DC Class 2			
I/O rating	Input: 120V AC 16 mA Output: 2 A, 240 V AC, 2 A, 24V DC	Input: 24V, 8.8 mA Output: 2 A, 240 V AC, 2 A, 24V DC	Input: 24V, 8.8 mA Output: 24V DC, Class 2, 1 A per point (surrounding air temperature 30 °C) 24V DC, Class 2, 0.3 A per point (surrounding air temperature 65 °C)	
Isolation voltage	250V (continuous), Reinforced Insulation Type, Output to Aux and Network, Inputs to Outputs. Type tested for 60 s @ 3250V DC Output to Aux and Network, Inputs to Outputs 150V (continuous), Reinforced Insulation Type, Input to Aux and Network. Type tested for 60 s @ 1950V DC Input to Aux and Network	250V (continuous), Reinforced Insulation Type, Output to Aux and Network, Inputs to Outputs. Type tested for 60 s @ 3250V DC Output to Aux and Network, Inputs to Outputs. 50V (continuous), Reinforced Insulation Type, Input to Aux and Network Type tested for 60 s @ 720V DC, Inputs to Aux and Network.	50V (continuous), Reinforced Insulation Type, I/O to Aux and Network, Inputs to Outputs. Type tested for 60 s @ 720V DC, I/O to Aux and Network, Inputs to Outputs.	
Pilot duty rating	C300, R150		—	
Insulation stripping length	7 mm (0.28 in.)			
Enclosure type rating	Meets IP20			
North American temp code	T4			

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

DC Input Specifications – 2080-LC50-24QWB, 2080-LC50-24QVB, 2080-LC50-24QBB

Attribute	High-Speed DC Input (Inputs 0...7)	Standard DC Input (Inputs 8 and higher)
Number of Inputs	8	6
Voltage category	24V sink/source	
Input group to backplane isolation	Verified by one of the following dielectric tests: 720V DC for 2 s 50V DC working voltage (IEC Class 2 reinforced insulation)	
On-state voltage range	16.8...26.4V DC @ 65 °C (149 °F) 16.8...30.0V DC @ 30 °C (86 °F)	10...26.4V DC @ 65 °C (149°F) 10...30.0V DC @ 30 °C (86°F)
Off-state voltage, max	5V DC	
Off-state current, max	1.5 mA	
On-state current, min	5.0 mA @ 16.8V DC	1.8 mA @ 10V DC
On-state current, nom	7.6 mA @ 24V DC	6.15 mA @ 24V DC
On-state current, max	12.0 mA @ 30V DC	12.0 mA @ 30V DC
Nominal impedance	3 kΩ	3.74 kΩ
IEC input compatibility	Type 3	

AC Input Specifications – 2080-LC50-24AWB

Attribute	Value
Number of inputs	14
On-state voltage, min	79V AC
On-state voltage, max	132V AC
On-state current, min	5 mA
Input frequency, nom	50/60 Hz
On-state current, max	16 mA
Input frequency, min	47 Hz
Input frequency, max	63 Hz
Off-state voltage, max	20V AC @ 120V AC
Off-state current, max	2.5 mA @ 120V AC
Inrush current, max	250 mA @ 120V AC
Inrush delay time constant, max	22 ms
IEC input compatibility	Type 3

Output Specifications

Attribute	2080-LC50-24AWB, 2080-LC50-24QWB	2080-LC50-24QVB, 2080-LC50-24QBB	
	Relay Output	Hi-Speed Output (Outputs 0...1)	Standard Output (Outputs 2 and higher)
Number of outputs	10	2	8
Output voltage, min	5V DC, 5V AC	10.8V DC	10V DC
Output voltage, max	125V DC, 265V AC	26.4V DC	26.4V DC
Load current, min	10 mA		
Load current, continuous, max	2.0 A	100 mA (high-speed operation) 1.0 A @ 30 °C 0.3 A @ 65 °C (standard operation)	1.0 A @ 30 °C 0.3 A @ 65 °C (standard operation)
Surge current, per point	Refer to Relay Contacts Ratings on page 37	4.0 A for 10 ms every 1 s @ 30 °C; every 2 s @ 65 °C ⁽¹⁾	
Current, per common, max	5 A	—	—
Turn on time/ Turn off time, max	10 ms	2.5 μs	ON: 0.1 ms OFF: 1 ms


(1) Applies for general purpose operation only; does not apply for high-speed operation.

Relay Contacts Ratings

Maximum Volts	Amperes		Amperes Continuous	Volt-Amperes	
	Make	Break		Make	Break
120V AC	15 A	1.5 A	2.0 A	1800V A	180V A
240V AC	7.5 A	0.75 A			
24V DC	1.0 A		1.0 A	28V A	
125V DC	0.22 A				

For the relay life chart, see the Specifications chapter of the Micro830, Micro850, and Micro870 User Manual, publication [2080-UM002](#).

Micro850 48-Point Controllers

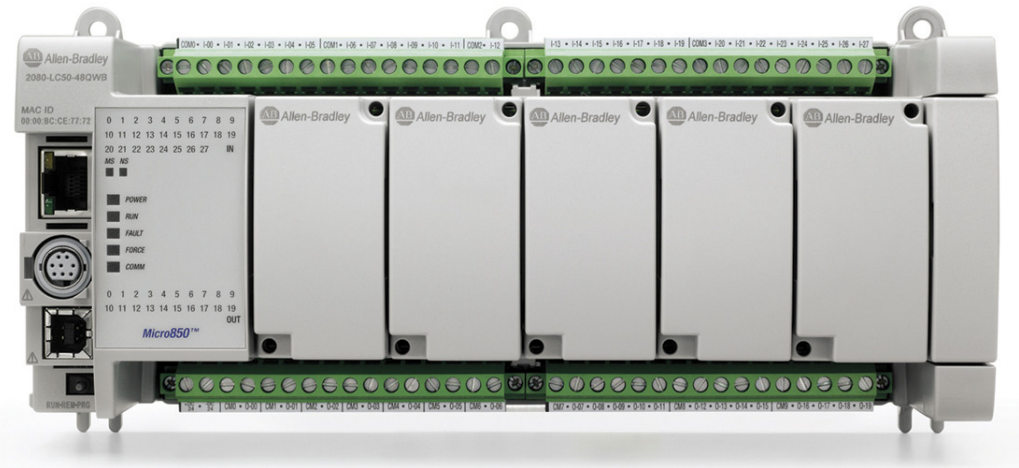

General Specifications – Micro850 48-Point Controllers

Attribute	2080-LC50-48AWB	2080-LC50-48QWB	2080-LC50-48QVB	2080-LC50-48QBB
Number of I/O	48 (28 inputs, 20 outputs)			
Dimensions (HxWxD)	90 x 238 x 80 mm (3.54 x 9.37 x 3.15 in.)			
Shipping weight, approx.	0.725 kg (1.60 lb)			
Wire size		Min	Max	
	Solid and Stranded	0.2 mm ² (24 AWG)	2.5 mm ² (14 AWG)	Rated @ 90 °C (194 °F) insulation max
Wiring category ⁽¹⁾	2 – on signal ports 2 – on power ports 2 – on communication ports			
Wire type	Use copper conductors only			
Terminal screw torque	0.4...0.5 Nm (3.5...4.4 lb-in.) using a 0.6 x 3.5 mm flat-blade screwdriver. (Note: Use a handheld screwdriver to hold down the screws at the side.)			
Input circuit type	120V AC	24V DC sink/source (standard and high-speed)		
Output circuit type	Relay		24V DC sink (standard and high-speed)	24V DC source (standard and high-speed)
Power consumption, max	11 W – without plug-in modules and expansion I/O modules 33 W –with plug-in modules and expansion I/O modules			
Power supply voltage range	20.4...26.4V DC Class 2			
I/O rating	Input: 120V AC, 16 mA Output: 2 A, 240V AC, 2 A, 24V DC	Input: 24V DC, 8.8 mA Output: 2 A, 240V AC, 2 A, 24V DC	Input: 24V DC, 8.8 mA Output: 24V DC, 1 A per point (Surrounding air temperature 30 °C) 24V DC, 0.3 A per point (Surrounding air temperature 65 °C)	
Insulation stripping length	7 mm (0.28 in.)			
Enclosure type rating	Meets IP20			

General Specifications – Micro850 48-Point Controllers

Attribute	2080-LC50-48AWB	2080-LC50-48QWB	2080-LC50-48QVB	2080-LC50-48QBB
Pilot duty rating	C300, R150			—
Isolation voltage	250V (continuous), Reinforced Insulation Type, Output to Aux and Network, Inputs to Outputs Type tested for 60 s @ 3250V DC Output to Aux and Network, Inputs to Outputs. 150V (continuous), Reinforced Insulation Type, Input to Aux and Network Type tested for 60 s @ 1950V DC Input to Aux and Network	250V (continuous), Reinforced Insulation Type, I/O to Aux and Network, Inputs to Outputs Type tested for 60 s @ 3250V DC Output to Aux and Network, Inputs to Outputs. 50V (continuous), Reinforced Insulation Type, Input to Aux and Network Type tested for 60 s @ 720V DC, Inputs to Aux and Network	50V (continuous), Reinforced Insulation Type, I/O to Aux and Network, Inputs to Outputs Type tested for 60 s @ 720V DC, I/O to Aux and Network, Inputs to Outputs.	
North American temp code	T4			

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Input Specifications

Attribute	2080-LC50-48AWB	2080-LC50-48QWB, 2080-LC50-48QVB, 2080-LC50-48QBB	
	120V AC Input	High-Speed DC Input (Inputs 0...11)	Standard DC Input (Inputs 12 and higher)
Number of Inputs	28	12	16
Input group to backplane isolation	Verified by the following dielectric tests: 1950V AC for 2 s 150V working voltage (IEC Class 2 reinforced insulation)	Verified by the following dielectric tests: 720V DC for 2 s 50V DC working voltage (IEC Class 2 reinforced insulation)	
Voltage category	110V AC	24V DC sink/source	
Operating voltage range	132V, 60Hz AC max	16.8...26.4V DC @ 65 °C (149 °F) 16.8...30.0V DC @ 30 °C (86 °F)	10...26.4V DC @ 65 °C (149 °F) 10...30.0V DC @ 30 °C (86 °F)
Off-state voltage, max	20V AC	5V DC	
Off-state current, max	1.5 mA	1.5 mA	
On-state current, min	5 mA @ 79V AC	5.0 mA @ 16.8V DC	1.8 mA @ 10V DC
On-state current, nom	12 mA @ 120V AC	7.6 mA @ 24V DC	6.15 mA @ 24V DC
On-state current, max	16 mA @ 132V AC	12.0 mA @ 30V DC	
Nominal impedance	12 k Ω @ 50 Hz 10 k Ω @ 60 Hz	3 k Ω	3.74 k Ω
IEC input compatibility	Type 3		
Inrush current, max	250 mA @ 120V AC	—	
Input frequency, max	63 Hz	—	

Output Specifications

Attribute	2080-LC50-48AWB, 2080-LC50-48QWB	2080-LC50-48QVB, 2080-LC50-48QBB	
	Relay Output	Hi-Speed Output (Outputs 0...3)	Standard Output (Outputs 4 and higher)
Number of outputs	20	4	16
Output voltage, min	5V DC, 5V AC	10.8V DC	10V DC
Output voltage, max	125V DC, 265V AC	26.4V DC	26.4V DC
Load current, min	10 mA		
Load current, max	2.0 A	100 mA (high-speed operation) 1.0 A @ 30 °C 0.3 A @ 65 °C (standard operation)	1.0 A @ 30 °C 0.3 A @ 65 °C (standard operation)
Surge current, per point	See Relay Contacts Ratings on page 37	4.0 A for 10 ms every 1 s @ 30 °C; every 2 s @ 65 °C ⁽¹⁾	
Current, per common, max	5 A	—	—
Turn on time/ Turn off time, max	10 ms	2.5 μs	ON: 0.1 ms OFF: 1 ms

(1) Applies for general purpose operation only. Does not apply for high-speed operation.

Relay Contacts Ratings

Maximum Volts	Amperes		Amperes Continuous	Volt-Amperes	
	Make	Break		Make	Break
120V AC	15 A	1.5 A	2.0 A	1800V A	180V A
240V AC	7.5 A	0.75 A			
24V DC	1.0 A		1.0 A	28V A	
125V DC	0.22 A				

For the relay life chart, see the Specifications chapter of the Micro830, Micro850, and Micro870 User Manual, publication [2080-UM002](#).



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Environmental Specifications

Environmental Specifications

Attribute	Value
Temperature, operating	IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock): -20...65 °C (-4...149 °F)
Temperature, surrounding air, max	65 °C (149 °F)
Temperature, nonoperating	IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock): -40...85 °C (-40...185 °F)
Relative humidity	IEC 60068-2-30 (Test Db, Unpackaged Damp Heat): 5...95% non-condensing
Vibration	IEC 60068-2-6 (Test Fc, Operating): 2 g @ 10...500 Hz
Shock, operating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): 25 g
Shock, nonoperating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): DIN mount: 25 g PANEL mount: 35 g
Emissions	IEC 61000-6-4
ESD immunity	IEC 61000-4-2: 6 kV contact discharges 8 kV air discharges
Radiated RF immunity	IEC 61000-4-3: 10V/m with 1 kHz sine-wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 10V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity	IEC 61000-4-4: ±2 kV @ 5 kHz on power ports ±2 kV @ 5 kHz on signal ports ±1 kV @ 5 kHz on communication ports
Surge transient immunity	IEC 61000-4-5: ±1 kV line-line(DM) and ±2 kV line-earth(CM) on signal ports ±1 kV line-earth(CM) on communication ports
Conducted RF immunity	IEC 61000-4-6: 10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz

Certifications

Certifications

Certification (when product is marked) ⁽¹⁾	Value
c-UL-us	<p>UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.</p> <p>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.</p>
CE	<p>European Union 2014/30/EU EMC Directive, compliant with: EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)</p> <p>European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11)</p> <p>European Union 2011/65/EU RoHS, compliant with: EN 50581; Technical Documentation</p>
RCM	<p>Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions</p>
KC	<p>Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3.</p>
EAC	<p>Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation</p>
EtherNet/IP	<p>ODVA conformance tested to EtherNet/IP specifications.</p>

(1) See the Product Certification link at <http://www.rockwellautomation.com/global/certification/overview.page> for Declaration of Conformity, Certificates, and other certification details.

Select a Micro870 Controller



A Micro870 controller with plug-in modules, eight expansion I/O modules, and an expansion I/O power supply attached

Micro870 controllers are designed for large standalone machine applications and come with great memory capacity to enable more modular program and use of user-defined function blocks. These controllers are capable of communicating on various networks and with devices through EtherNet/IP, Serial, and USB ports.

Micro870 controllers include:

- Expansion I/O support
- up to six embedded High-Speed Counter inputs (HSC)⁽¹⁾
- 100 kHz speed HSC available on 24V DC models
- up to three embedded Pulse Train Outputs (PTO)⁽²⁾ for basic positioning
- High speed input interrupts
- Modbus RTU protocol (serial port)
- Modbus/TCP support
- EtherNet/IP support
- CIP Serial support
- Embedded USB programming and serial port (RS232/485)
- Embedded 10/100 Base-T Ethernet port (RJ45)
- Plug-in slots to customize according to needs

To help you select a Micro870 controller, see the following specifications.

(1) Embedded HSC is supported on all Micro870 controller catalog numbers, except on 2080-LC70-24AWB.

(2) PTO is supported on Micro870 controller catalog numbers ending in BB.


Micro870 Controllers – Number and Types of Inputs and Outputs

Catalog Number	Inputs		Outputs			PTO/PWM Support	HSC Support ⁽¹⁾
	120V AC	24V DC/ V AC	Relay	24V Sink	24V Source		
2080-LC70-24AWB	14	–	10	–	–	–	–
2080-LC70-24QWB	–	14	10	–	–	–	4
2080-LC70-24QWBK	–	14	10	–	–	–	4
2080-LC70-24QBB	–	14	–	–	10	2	4
2080-LC70-24QBBK	–	14	–	–	10	2	4

(1) Maximum number of HSC supported.

For more information, see the Micro830, Micro850, and Micro870 Programmable Controllers User Manual, publication [2080-UM002](#).

Micro870 24-Point Controllers

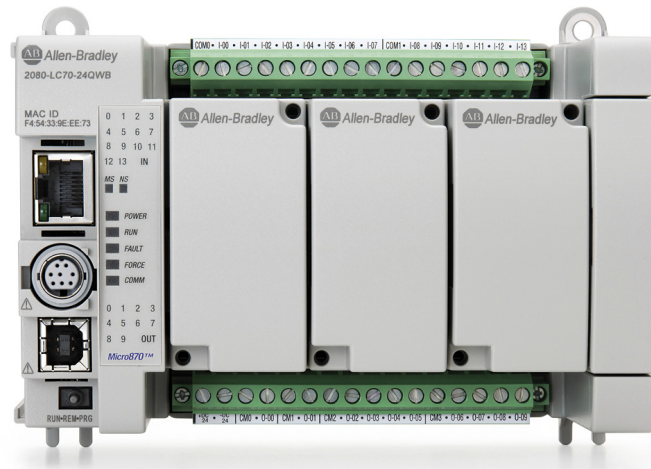

General Specifications – Micro870 24-Point Controllers

Attribute	2080-LC70-24AWB	2080-LC70-24QWB, 2080-LC70-24QWBK	2080-LC70-24QBB, 2080-LC70-24QBBK
Number of I/O	24 (14 inputs, 10 outputs)		
Dimensions (HxWxD)	90 x 157 x 80 mm (3.54 x 6.22 x 3.15 in.)		
Shipping weight, approx.	0.47 kg (1.04 lb)		
Wire size		Min	Max
	Solid and Stranded	0.2 mm ² (24 AWG)	2.5 mm ² (14 AWG)
			Rated @ 90 °C (194 °F) insulation max
Wiring category ^{(1) (2)}	2 – on signal ports 2 – on power ports 2 – on communication ports		
Wire type	Use copper conductors only		

General Specifications – Micro870 24-Point Controllers

Attribute	2080-LC70-24AWB	2080-LC70-24QWB, 2080-LC70-24QWBK	2080-LC70-24QBB, 2080-LC70-24QBBK
Terminal screw torque	0.4...0.5 Nm (3.5...4.4 lb-in.) using a 0.6 x 3.5 mm flat-blade screwdriver. Note: Use a handheld screwdriver to hold down the screws at the side.		
Input circuit type	12/24V sink/source (standard) 24V sink/source (high-speed)		
Output circuit type	Relay		24V DC source (standard and high-speed)
Power consumption, max	8 W – without plug-in modules and expansion I/O modules 28 W – with plug-in modules and expansion I/O modules		
Power supply voltage range	21.4...26.4V DC Class 2, or Limited Voltage Limited Current Source (LVLC)		
I/O rating	Input: 120V AC, 16 mA Output: 2 A, 240V AC 2 A, 24V DC	Input: 24V, 8.8 mA Output: 2 A, 240V AC 2 A, 24V DC	Input: 24V, 8.8 mA Output: 24V DC, Class 2, 1 A per point (Surrounding air temperature 30 °C) 24V DC, Class 2, 0.3 A per point (Surrounding air temperature 65 °C)
Isolation voltage	250V (continuous), Reinforced Insulation Type, Output to Aux and Network, Inputs to Outputs. Type tested for 60 s @ 3250V DC Output to Aux and Network, Inputs to Outputs. 150V (continuous), Reinforced Insulation Type, Input to Aux and Network Type tested for 60 s @ 1950V DC, Inputs to Aux and Network	250V (continuous), Reinforced Insulation Type, Output to Aux and Network, Inputs to Outputs. Type tested for 60 s @ 3250V DC Output to Aux and Network, Inputs to Outputs. 50V (continuous), Reinforced Insulation Type, Input to Aux and Network Type tested for 60 s @ 720V DC, Inputs to Aux and Network	50V (continuous), Reinforced Insulation Type, I/O to Aux and Network, Inputs to Outputs. Type tested for 60 s @ 720 V DC, I/O to Aux and Network, Inputs to Outputs.
Pilot duty rating	C300, R150		—
Insulation stripping length	7 mm (0.28 in.)		
Enclosure type rating	Meets IP20		
North American temp code	T4		

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

(2) Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

DC Input Specifications

Attribute	2080-LC70-24QWB, 2080-LC70-24QWBK, 2080-LC70-24QBB, 2080-LC70-24QBBK	
	High-Speed DC Input (Inputs 0...7)	Standard DC Input (Inputs 8 and higher)
Number of Inputs	8	6
Voltage category	24V sink/source	
Input group to backplane isolation	Verified by one of the following dielectric tests: 720V DC for 2 s 50V DC working voltage (IEC Class 2 reinforced insulation)	
On-state voltage range	16.8...26.4V DC @ 65 °C (149 °F) 16.8...30.0V DC @ 30 °C (86 °F)	10...26.4V DC @ 65 °C (149°F) 10...30.0V DC @ 30 °C (86°F)
Off-state voltage, max	5V DC	
Off-state current, max	1.5 mA	
On-state current, min	5.0 mA @ 16.8V DC	1.8 mA @ 10V DC
On-state current, nom	7.6 mA @ 24V DC	6.15 mA @ 24V DC
On-state current, max	12.0 mA @ 30V DC	12.0 mA @ 30V DC
Nominal impedance	3 kΩ	3.74 kΩ
IEC input compatibility	Type 3	

AC Input Specifications

Attribute	2080-LC50-24AWB
Number of inputs	14
On-state voltage, min	79V AC
On-state voltage, max	132V AC
On-state current, min	5 mA
On-state current, max	16 mA
Input frequency, min	47 Hz
Input frequency, nom	50/60 Hz
Input frequency, max	63 Hz
Off-state voltage, max	20V AC @ 120V AC
Off-state current, max	2.5 mA @ 120V AC
Inrush current, max	250 mA @ 120V AC
Inrush delay time constant, max	22 ms
IEC input compatibility	Type 3

Output Specifications

Attribute	2080-LC70-24AWB, 2080-LC70-24QWB, 2080-LC70-24QWBK	2080-LC70-24QBB, 2080-LC70-24QBBK	
	Relay Output	Hi-Speed Output (Outputs 0...1)	Standard Output (Outputs 2 and higher)
Number of outputs	10	2	8
Output voltage, min	5V DC, 5V AC	10.8V DC	10V DC
Output voltage, max	125V DC, 265V AC	26.4V DC	26.4V DC
Load current, min	10 mA		
Load current, continuous, max	2.0 A	100 mA (high-speed operation) 1.0 A @ 30 °C 0.3 A @ 65 °C (standard operation)	1.0 A @ 30 °C 0.3 A @ 65 °C (standard operation)
Surge current, per point	Refer to Relay Contacts Ratings on page 47	4.0 A for 10 ms every 1 s @ 30 °C; every 2 s @ 65 °C ⁽¹⁾	
Current, per common, max	5 A	—	—
Turn on time/ Turn off time, max	10 ms	2.5 μs	ON: 0.1 ms OFF: 1 ms

(1) Applies for general purpose operation only; does not apply for high-speed operation.

Relay Contacts Ratings

Maximum Volts	Amperes		Amperes Continuous	Volt-Amperes	
	Make	Break		Make	Break
120V AC	15 A	1.5 A	2.0 A	1800V A	180V A
240V AC	7.5 A	0.75 A			
24V DC	1.0 A		1.0 A	28V A	
125V DC	0.22 A		0.22 A		

For the relay life chart, see the Specifications chapter of the Micro830, Micro850, and Micro870 User Manual, publication [2080-UM002](#).



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Environmental Specifications

Environmental Specifications

Attribute	Value
Temperature, operating	IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock): -20...65 °C (-4...149 °F)
Temperature, surrounding air, max	65 °C (149 °F)
Temperature, nonoperating	IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock): -40...85 °C (-40...185 °F)
Relative humidity	IEC 60068-2-30 (Test Db, Unpackaged Damp Heat): 5...95% non-condensing
Vibration	IEC 60068-2-6 (Test Fc, Operating): 2 g @ 10...500 Hz
Shock, operating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): 25 g
Shock, nonoperating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): DIN mount: 25 g PANEL mount: 35 g
Emissions	IEC 61000-6-4
ESD immunity	IEC 61000-4-2: 6 kV contact discharges 8 kV air discharges
Radiated RF immunity	IEC 61000-4-3: 10V/m with 1 kHz sine-wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 10V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity	IEC 61000-4-4: ±2 kV @ 5 kHz on power ports ±2 kV @ 5 kHz on signal ports ±1 kV @ 5 kHz on communication ports
Surge transient immunity	IEC 61000-4-5: ±1 kV line-line(DM) and ±2 kV line-earth(CM) on signal ports ±1 kV line-earth(CM) on communication ports
Conducted RF immunity	IEC 61000-4-6: 10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz

Certifications


Certifications

Certification (when product is marked)⁽¹⁾	Value
c-UL-us	<p>UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.</p> <p>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.</p>
CE	<p>European Union 2014/30/EU EMC Directive, compliant with: EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)</p> <p>European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11)</p> <p>European Union 2011/65/EU RoHS, compliant with: EN 50581; Technical Documentation</p>
RCM	<p>Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions</p>
KC	<p>Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3</p>
EAC	<p>Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation</p>
EtherNet/IP	<p>ODVA conformance tested to EtherNet/IP specifications</p>

(1) See the Product Certification link at <http://www.rockwellautomation.com/global/certification/overview.page> for Declaration of Conformity, Certificates, and other certification details.

Notes:

Select Micro800 Expansion I/O Modules

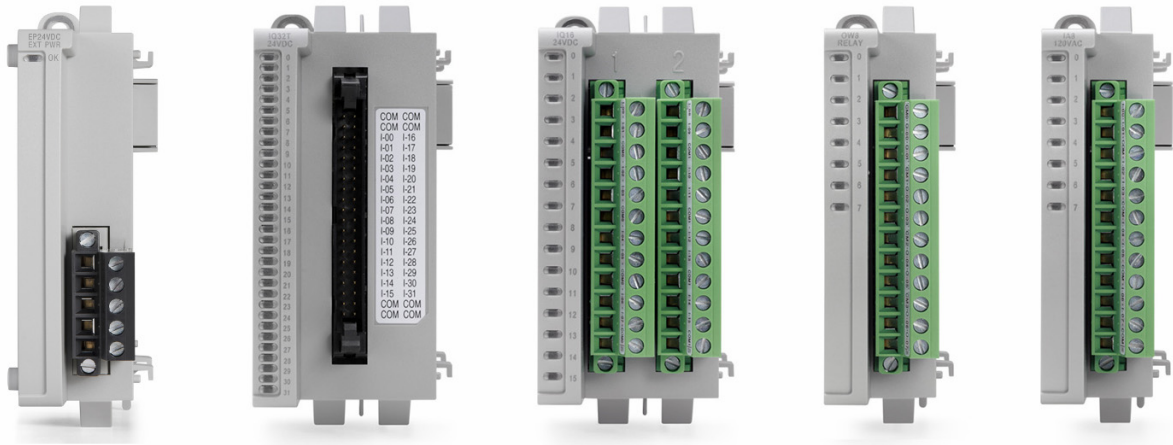

The Micro800 expansion I/O modules provide superior functionality in a small-sized low-cost package. A variety of digital and analog modules complement and extend the capabilities of Micro850 and Micro870 controllers by maximizing the flexibility of I/O count and type.

Micro800 expansion I/O modules include high density discrete and analog I/O modules, including a high accuracy RTD and Thermocouple module.

There are available solid state output modules which are recommended to reduce switching noise and for applications which require more switching cycles, than relays. Triac outputs are available for AC loads. Sink and source transistor outputs are available for DC loads.

The following section provides the list of available Micro800 expansion I/O modules and their specifications.

Micro800 Expansion I/O Modules

Catalog Number	Type	Description
2085-IA8	Discrete	8-point, 120V AC input
2085-IM8	Discrete	8-point, 240V AC input
2085-OA8	Discrete	8-point, 120/240V AC Triac Output
2085-IQ16	Discrete	16-point, 12/24V DC Sink/Source Input
2085-IQ32T	Discrete	32-point, 12/24V DC Sink/Source Input
2085-OV16	Discrete	16-point, 12/24V DC Sink Transistor Output
2085-OB16	Discrete	16-point, 12/24V DC Source Transistor Output

Micro800 Expansion I/O Modules

Catalog Number	Type	Description
2085-OW8	Discrete	8-point, AC/DC Relay Output
2085-OW16	Discrete	16-point, AC/DC Relay Output
2085-IF4	Analog	4-channel, 14-bit isolated ⁽³⁾ voltage/current input
2085-IF8	Analog	8-channel, 14-bit isolated ⁽²⁾ voltage/current input
2085-OF4	Analog	4-channel, 12-bit isolated ⁽²⁾ voltage/current output
2085-IRT4	Specialty	4-channel, 16-bit RTD and TC isolated ⁽²⁾ input module
2085-EP24VDC ⁽¹⁾	Power Supply	Supplies power for up to four expansion I/O modules
2085-ECR ⁽²⁾	Terminator	2085 bus terminator

(1) Use only in a Micro870 system with more than four expansion I/O modules.

(2) The 2085-ECR bus terminator should always be the last module on the system, if any expansion I/O module is attached to the system.

(3) Refers to isolation from field side wiring to controller, **not** channel-to-channel isolation.

Discrete Expansion I/O

Specifications – 2085-IQ16 and 2085-IQ32T DC Sink/Source Input Modules⁽¹⁾

Attribute	2085-IQ16	2085-IQ32T
Number of inputs	16 sink/source	32 sink/source
Dimensions (HxWxD)	44.5 x 90 x 87 mm (1.75 x 3.54 x 3.42 in.)	
Shipping weight, approx.	220 g (7.76 oz)	
Bus current draw, max	170 mA @ 5V DC	190 mA @ 5V DC
Wire size	0.25... 2.5 mm ² (22...14 AWG) solid or stranded copper wire rated @ 75 °C (167 °F), or greater, 1.2 mm (3/64 in.) insulation max	
Wiring category ⁽²⁾	2 – on signal ports	
Terminal screw torque, max	0.5...0.6 Nm (4.4...5.3 lb-in.) ⁽³⁾	
Input circuit type	24V AC/DC sink/source	
Power dissipation, total	4.5 W	7 W
Power supply	24V DC	
Status indicators	16 yellow indicators	32 yellow indicators
Isolation voltage	50V (continuous), Reinforced Insulation Type, channel to system Type tested @ 720V DC for 60 s	
Enclosure type rating	Meets IP20	
North American temp code	T4	
Operating voltage range	10...30V DC, Class 2 21.6...26.4V AC, Class 2 See Derating Curve for 2085-IQ16 and Derating Curve for 2085-IQ32T on page 53	
Off-state voltage, max	5V DC	
Off-state current, max	1.5 mA	1.2 mA
On-state current, min	1.8 mA @ 10V DC	
On-state current, nom	6.0 mA @ 24V DC	5.2 mA @ 24V DC

Specifications – 2085-IQ16 and 2085-IQ32T DC Sink/Source Input Modules⁽¹⁾


Attribute	2085-IQ16	2085-IQ32T
On-state current, max	8.0 mA @ 30V DC	7.0 mA @ 30V DC
Input impedance, max	3.9 kΩ	4.6 kΩ
IEC input compatibility	Type 3	Type 1

- (1) Meets IEC Type 1 24V DC Input Specifications.
- (2) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).
- (3) RTB hold down screws should be tightened by hand. They should not be tightened using a power tool.




At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Derating Curve for 2085-IQ16

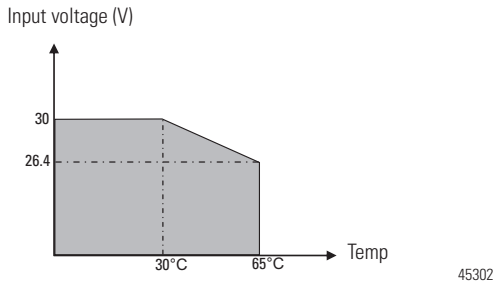

Derating Curve for 2085-IQ32

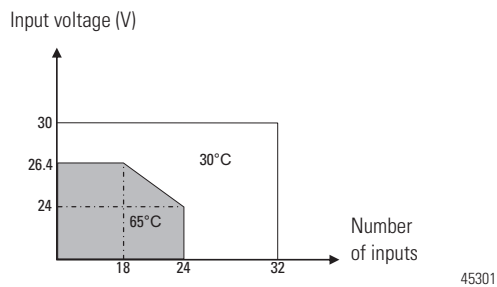

Specifications – 2085-OV16 Sink and 2085-OB16 Source DC Output Modules

Attribute	2085-OV16	2085-OB16
Number of outputs	16 sinking	16 sourcing
Operating voltage range	10...30V DC	
On-state voltage, min	10V DC	
On-state voltage, nom	24V DC	
On-state voltage, max	30V DC	
On-state current, max	0.5 A @ 30V DC, per output 8 A, per module	

Specifications – 2085-OV16 Sink and 2085-OB16 Source DC Output Modules

Attribute	2085-OV16	2085-OB16
Dimensions (HxWxD)	44.5 x 90 x 87 mm (1.75 x 3.54 x 3.42 in.)	
Shipping weight, approx.	220 g (7.76 oz)	
Bus current draw, max	200 mA @ 5V DC	
Wire size	0.25... 2.5 mm ² (22...14 AWG) solid or stranded copper wire rated @ 75 °C (167 °F), or greater, 1.2 mm (3/64 in.) insulation max	
Wiring category ⁽¹⁾	2 – on signal ports	
Terminal screw torque, max	0.5...0.6 Nm (4.4...5.3 lb-in.) ⁽²⁾	
Output circuit type	24V DC sink	24V DC source
Power dissipation, total	5 W	
Power supply	24V DC, Class 2	
Status indicators	16 Yellow channel indicators	
Isolation voltage	50V (continuous), Reinforced Insulation Type, channel to system Type tested @ 720V AC for 60 s	
Enclosure type rating	Meets IP20	
North American temp code	T4	

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

(2) RTB hold down screws should be tightened by hand. They should not be tightened using a power tool.

Specifications – 2085-IA8, 2085-IM8, 2085-OA8 AC Input/Output Modules

Attribute	2085-IA8	2085-IM8	2085-OA8
Number of inputs	8		
Dimensions (HxWxD)	28 x 90 x 87 mm (1.10 x 3.54 x 3.42 in.)		
Shipping weight, approx.	140 g (4.93 oz)		
Bus current draw, max	5V DC, 150 mA		5V DC, 180 mA
Wire size	0.25... 2.5 mm ² (22...14 AWG) solid or stranded copper wire rated @ 75 °C (167 °F), or greater, 1.2 mm (3/64 in.) insulation max		
Insulation stripping length	10 mm (0.39 in.)		
Wiring category ⁽¹⁾	2 – on signal ports		
Wire type	Copper		
Terminal screw torque, max	0.5...0.6 Nm (4.4...5.3 lb-in.) ⁽²⁾		
Input/output circuit type	120V AC input	240V AC input	120V/240V AC output
Power supply	120V AC	240V AC	120V/240V AC
Power dissipation, total	2.36 W	2.34 W	5.19 W
Enclosure type rating	Meets IP20		

Specifications – 2085-IA8, 2085-IM8, 2085-OA8 AC Input/Output Modules

Attribute	2085-IA8	2085-IM8	2085-OA8
Status indicators	8 yellow indicators		
Isolation voltage	150V (continuous), Reinforced Insulation Type, channel to system Type tested @ 1950V DC for 60 s	240V (continuous), Reinforced Insulation Type, channel to system Type tested @ 3250V DC for 60 s	
North American temp code	T4		

- (1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).
- (2) RTB hold down screws should be tightened by hand. They should not be tightened using a power tool.



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Input Specifications – 2085-IA8 and 2085-IM8

Attribute	2085-IA8	2085-IM8
Number of Inputs	8	
Voltage category	120V AC	240V AC
Operating voltage range	74...120V AC	159...240V AC
Off-state voltage, max	20V AC	40V AC
Off-state current, max	2.5 mA	
On-state current, min	5.0 mA @ 74V AC	4.0 mA @ 159V AC
On-state current, max	12.5 mA @ 120V AC	7.0 mA @ 240V AC
Input impedance, max	22.2 kΩ	
Inrush current, max	450 mA	
Input filter time Off to On On to Off	≤ 20 ms	
IEC type compliance	Type 3	

Output Specifications – 2085-OA8

Attribute	2085-OA8
Number of Inputs	8
Voltage category	120V/230V AC
Operating voltage range	120...240V AC
Output voltage, min	85V AC
Output voltage, max	240V AC
Off-state current, max	2.5 mA

Output Specifications – 2085-OA8

Attribute	2085-OA8
On-state current, min	10 mA per output
On-state current, max	0.5 A per output
On-state current, per module, max	4 A
Off-state voltage drop, max	1.5V AC @ 0.5 A 2.5V AC @10 mA
Fusing	Not protected. A suitable rating fuse is recommended to protect outputs.
Output signal delay Off to On On to Off	9.3 ms for 60 Hz, 11 ms for 50 Hz 9.3 ms for 60 Hz, 11 ms for 50 Hz
Surge current, max	5 A

Specifications – 2085-OW8 and 2085-OW16 Relay Output Module

Attribute	2085-OW8	2085-OW16																													
Number of outputs	8, relay	16, relay																													
Dimensions (HxWxD)	28 x 90 x 87 mm (1.10 x 3.54 x 3.42 in.)	44.5 x 90 x 87 mm (1.75 x 3.54 x 3.42 in.)																													
Shipping weight, approx.	140 g (4.93 oz)	220 g (7.76 oz)																													
Wire size	0.25... 2.5 mm ² (22...14 AWG) solid or stranded copper wire rated @ 75 °C (167 °F), or greater, 1.2 mm (3/64 in.) insulation max																														
Insulation strip length	10 mm (0.39 in.)																														
Wiring category ⁽¹⁾	2 – on signal ports																														
Wire type	Copper																														
Terminal screw torque, max	0.5...0.6 Nm (4.4...5.3 lb-in.) ⁽²⁾																														
Bus current draw, max	5V DC, 120 mA 24V DC, 50 mA	5V DC, 160 mA 24V DC, 100 mA																													
Load current, max	2 A																														
Power dissipation, total	2.72 W	5.14 W																													
Relay contact (0.35 power factor)	<table border="1"> <thead> <tr> <th rowspan="2">Max Volts</th> <th colspan="2">Amperes</th> <th>Amperes</th> <th colspan="2">Volt Amperes</th> </tr> <tr> <th>Make</th> <th>Break</th> <th>Continuous</th> <th>Make</th> <th>Break</th> </tr> </thead> <tbody> <tr> <td>120V AC</td> <td>15 A</td> <td>1.5 A</td> <td rowspan="2">2.0 A</td> <td rowspan="2">1800V A</td> <td rowspan="2">180V A</td> </tr> <tr> <td>240V AC</td> <td>7.5 A</td> <td>0.75 A</td> </tr> <tr> <td>24V DC</td> <td colspan="2">1.0 A</td> <td rowspan="2">1.0 A</td> <td colspan="2" rowspan="2">28V A</td> </tr> <tr> <td>125V DC</td> <td colspan="2">0.22 A</td> </tr> </tbody> </table>		Max Volts	Amperes		Amperes	Volt Amperes		Make	Break	Continuous	Make	Break	120V AC	15 A	1.5 A	2.0 A	1800V A	180V A	240V AC	7.5 A	0.75 A	24V DC	1.0 A		1.0 A	28V A		125V DC	0.22 A	
Max Volts	Amperes			Amperes	Volt Amperes																										
	Make	Break	Continuous	Make	Break																										
120V AC	15 A	1.5 A	2.0 A	1800V A	180V A																										
240V AC	7.5 A	0.75 A																													
24V DC	1.0 A		1.0 A	28V A																											
125V DC	0.22 A																														
Minimum load, per point	10 mA per point																														
Off-state leakage, max	1.5 mA																														
Status indicators	8 yellow indicators	16 yellow indicators																													
Isolation voltage	240V (continuous), Reinforced Insulation Type, channel to system Type tested @ 3250V DC for 60 s																														

Specifications – 2085-OW8 and 2085-OW16 Relay Output Module

Attribute	2085-OW8	2085-OW16
Pilot duty rating	C300, R150	
Enclosure type rating	Meets IP20	
North American temp code	T4	

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

(2) RTB hold down screws should be tightened by hand. They should not be tightened using a power tool.



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Analog Expansion I/O

Specifications – 2085-IF4, 2085-IF8, 2085-OF4 Analog Input and Output Modules

Attribute	2085-IF4	2085-OF4	2085-IF8
Number of I/O	4		8
Dimensions (HxWxD)	28 x 90 x 87 mm (1.1 x 3.54 x 3.42 in.)		44.5 x 90 x 87 mm (1.75 x 3.54 x 3.42 in.)
Shipping weight, approx.	140 g (4.93 oz)		220 g (7.76 oz)
Bus current draw, max	5V DC, 100 mA 24V DC, 50 mA	5V DC, 160 mA 24V DC, 120 mA	5V DC, 110 mA 24V DC, 50 mA
Wire size	0.25... 2.5 mm ² (22...14 AWG) solid or stranded copper wire rated @ 75 °C (167 °F), or greater, 1.2 mm (3/64 in.) insulation max		
Wiring category ⁽¹⁾	2 – on signal ports		
Wire type	Shielded		
Terminal screw torque	0.5...0.6 Nm (4.4...5.3 lb-in.) ⁽²⁾		
Power dissipation, total	1.7 W	3.7 W	1.75 W
Enclosure type rating	Meets IP20		
Status indicators	1 green health indicator	1 green health indicator	1 green health indicator 8 red error indicators
Isolation voltage	50V (continuous), Reinforced Insulation Type, channel to system and channel to channel. Type tested @ 720V DC for 60 s		
North American temp code	T4		

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

(2) RTB hold down screws should be tightened by hand. They should not be tightened using a power tool.



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Input Specifications – 2085-IF4 and 2085-IF8

Attribute	2085-IF4	2085-IF8
Number of inputs	4	8
Resolution Voltage Current	14 bits (13 bits plus sign bit) 1.28 mV/cnt unipolar; 1.28 mV/cnt bipolar 1.28 μ A/cnt	
Data format	Left justified, 16 bit 2s complement	
Conversion type	SAR	
Update rate	< 2 ms per enabled channel without 50 Hz/60 Hz rejection, < 8 ms for all channel 8 ms with 50 Hz/60 Hz rejection	
Step response time up to 63%	4...60 ms without 50Hz/60 Hz rejection – depends on number of enabled channel and filter setting 600 ms with 50 Hz/60 Hz rejection	
Input current terminal, user configurable	4...20 mA (default) 0...20 mA	
Input voltage terminal, user configurable	\pm 10V 0...10V	
Input impedance	Voltage terminal >1 M Ω Current terminal <100 Ω	
Absolute accuracy	\pm 0.10% Full Scale @ 25 ° C	
Accuracy drift with temp	Voltage terminal – 0.00428% Full Scale/° C Current terminal – 0.00407% Full Scale/° C	
Calibration required	Factory calibrated. No customer calibration supported.	
Overload, max.	30V continuous or 32 mA continuous, one channel at a time.	
Channel diagnostics	Over and under range or open circuit condition by bit reporting	

Output Specifications – 2085-OF4

Attribute	2085-OF4
Number of outputs	4
Resolution Voltage Current	12 bits unipolar; 11 bits plus sign bipolar 2.56 mV/cnt unipolar; 5.13 mV/cnt bipolar 5.13 μ A/cnt
Data format	Left justified, 16 bit 2s complement
Step response time up to 63%	2 ms
Conversion rate, max	2 ms per channel
Output current terminal, user configurable	0 mA output until module is configured 4...20 mA (default) 0...20 mA
Output voltage terminal, user configurable	\pm 10V 0...10V
Current load on voltage output, max	3 mA

Output Specifications – 2085-OF4

Attribute	2085-OF4
Absolute accuracy Voltage terminal Current terminal	0.133% Full Scale @ 25 °C or better 0.425% Full Scale @ 25 °C or better
Accuracy drift with temp	Voltage terminal – 0.0045% Full Scale/°C Current terminal – 0.0069% Full Scale/°C
Resistive load on mA output	15...500 Ω @ 24V DC

Specialty Expansion I/O**Specifications – 2085-IRT4 Temperature Input Module**

Attribute	2085-IRT4
Number of inputs	4
Dimensions (HxWxD)	44.5 x 90 x 87 mm (1.75 x 3.54 x 3.42 in.)
Shipping weight, approx.	220 g (7.76 oz)
Bus current draw, max	5V DC, 160 mA 24V DC, 50 mA
Wire size	0.25... 2.5 mm ² (22...14 AWG) solid or stranded copper wire rated @ 75 °C (167 °F), or greater, 1.2 mm (3/64 in.) insulation max
Wiring category ⁽¹⁾	2 – on signal ports
Terminal screw torque	0.5...0.6 Nm (4.4...5.3 lb-in.) ⁽²⁾
Input type	Thermocouple type: B, C, E, J, K, TXK/XK (L), N, R, S, T RTD type: 100 Ω Pt α = 0.00385 Euro 200 Ω Pt α = 0.00385 Euro 100 Ω Pt α = 0.003916 U.S. 200 Ω Pt α = 0.003916 U.S. 100 Ω Nickel 618 200 Ω Nickel 618 120 Ω Nickel 672 10 Ω Copper 427 mV range: 0...100 mV Ohm input: 0...500 Ω
Resolution	16 bits
Channel update time, typical	12...500 ms per enabled channel
Input impedance	> 10 M Ω
Accuracy	±0.5...±3.0 °C accuracy for Thermocouple inputs ±0.2...±0.6 °C accuracy for RTD inputs
Power dissipation, total	2 W
Enclosure type rating	Meets IP20
Status indicators	1 green health indicator
Isolation voltage	50V (continuous), Reinforced Insulation Type, channel to system. Type tested @ 720V DC for 60 s
North American temp code	T4

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

(2) RTB hold down screws should be tightened by hand. They should not be tightened using a power tool.



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Environmental Specifications

Environmental Specifications – All Micro800 Expansion I/O Modules

Attribute	Value
Temperature, operating	IEC60068-2-1 (Test Ad, Operating Cold), IEC60068-2-2, (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock): -20...65 °C (-4...149 °F)
Temperature, nonoperating	IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock): -40...85 °C (-40...185 °F)
Temperature, surrounding air, max.	65 °C (149 °F)
Relative humidity	IEC 60068-2-30 (Test Db, Unpackaged Damp Heat): 5...95% noncondensing
Vibration	IEC 60068-2-6 (Test Fc, Operating): 2 g @ 10...500 Hz
Shock, operating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): 25 g
Shock, nonoperating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): DIN rail mount: 25 g Panel Mount: 35 g
Emissions	IEC 61000-6-4
ESD Immunity	IEC 61000-4-2: 6 kV contact discharges 8 kV air discharges
Radiated RF Immunity	IEC 61000-4-3: 10V/m with 1 kHz sine-wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 10V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B Immunity	IEC 61000-4-4: ±2 kV @ 5 kHz on signal ports
Surge Transient Immunity	IEC 61000-4-5: ±1 kV line-line(DM) and ±2 kV line-earth(CM) on power ports ±2 kV line-earth(CM) on shielded ports
Conducted RF Immunity	IEC 61000-4-6: 10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz

Certifications

Certifications – All Micro800 Expansion I/O Modules

Certification (when product is marked) ⁽¹⁾	Value
c-UL-us	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470
CE	European Union 2014/30/EU EMC Directive, compliant with: EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61010-2-201; Control Equipment Safety Requirements European Union 2011/65/EU RoHS, compliant with: EN 50581; Technical Documentation
RCM	Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3
EAC	Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation

(1) See the Product Certification link at <http://www.rockwellautomation.com/global/certification/overview.page> for Declaration of Conformity, Certificates, and other certification details.

Expansion I/O Power Supply

Specifications – 2085-EP24VDC Expansion I/O Power Supply

Attribute	2085-EP24VDC
I/O module capacity	4
Input voltage rating	21.4...26.4V DC Class 2 or Limited Voltage Limited Current Source (LVLC)
Power consumption, max	24 W
Inrush current, max	6 A for 10 ms
Bus side power rating, max	24V DC (±10%) @ 700 mA 5V DC (±5%) @ 900 mA Maximum bus power limited to 16.8 W
Interruption	Output voltage stays within specifications when inputs drops out for 10 ms @ 24V with max load. More than 10 ms interruption can cause the Micro870 controller to fault.
Dimensions (HxWxD)	110.0 x 36.2 x 87.0 mm (4.3 x 1.4 x 3.4 in)
Shipping weight, approx.	0.09 kg (0.02 lb)
Wire size	0.25... 2.5 mm ² (22...14 AWG) solid or stranded copper wire rated @ 75 °C (167 °F), or greater, 1.2 mm (3/64 in.) insulation max
Wiring category ⁽¹⁾	2 – on signal ports

Specifications – 2085-EP24VDC Expansion I/O Power Supply

Attribute	2085-EP24VDC
Terminal screw torque	0.5...0.6 Nm (4.4...5.3 lb-in.) ⁽²⁾
Enclosure type rating	None (open-style)
North American temp code	T4

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

(2) RTB hold down screws should be tightened by hand. They should not be tightened using a power tool.



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Environmental Specifications

Attribute	Value
Temperature, operating	IEC60068-2-1 (Test Ad, Operating Cold), IEC60068-2-2, (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock): -20...65 °C (-4...149 °F)
Temperature, nonoperating	IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock): -40...85 °C (-40...185 °F)
Temperature, surrounding air, max.	65 °C (149 °F)
Relative humidity	IEC 60068-2-30 (Test Db, Unpackaged Damp Heat): 5...95% noncondensing
Vibration	IEC 60068-2-6 (Test Fc, Operating): 2 g @ 10...500 Hz
Shock, operating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): 25 g
Shock, nonoperating	IEC 60068-2-27 (Test Ea, Unpackaged Shock): DIN rail mount: 25 g Panel Mount: 35 g
Emissions	IEC 61000-6-4
ESD Immunity	IEC 61000-4-2: 6 kV contact discharges 8 kV air discharges
Radiated RF Immunity	IEC 61000-4-3: 10V/m with 1 kHz sine-wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 10V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B Immunity	IEC 61000-4-4: ±2 kV @ 5 kHz on signal ports
Surge Transient Immunity	IEC 61000-4-5: ±1 kV line-line(DM) and ±2 kV line-earth(CM) on power ports
Conducted RF Immunity	IEC 61000-4-6: 10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz


Certifications

Certification (when product is marked)⁽¹⁾	Value
c-UL-us	<p>UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.</p> <p>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470</p>
CE	<p>European Union 2014/30/EU EMC Directive, compliant with: EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)</p> <p>European Union 2014/35/EU LVD, compliant with: EN 61010-2-201; Control Equipment Safety Requirements</p> <p>European Union 2011/65/EU RoHS, compliant with: EN 50581; Technical Documentation</p> <p>Turkey RoHS EEE Yönetmeligine Uygun (In Conformity with the EEE Regulation)</p>
RCM	<p>Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions</p>
KC	<p>Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3</p>
EAC	<p>Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation</p>

(1) See the Product Certification link at <http://www.rockwellautomation.com/global/certification/overview.page> for Declaration of Conformity, Certificates, and other certification details.


Notes:

Select Micro800 Plug-in Modules and Accessories

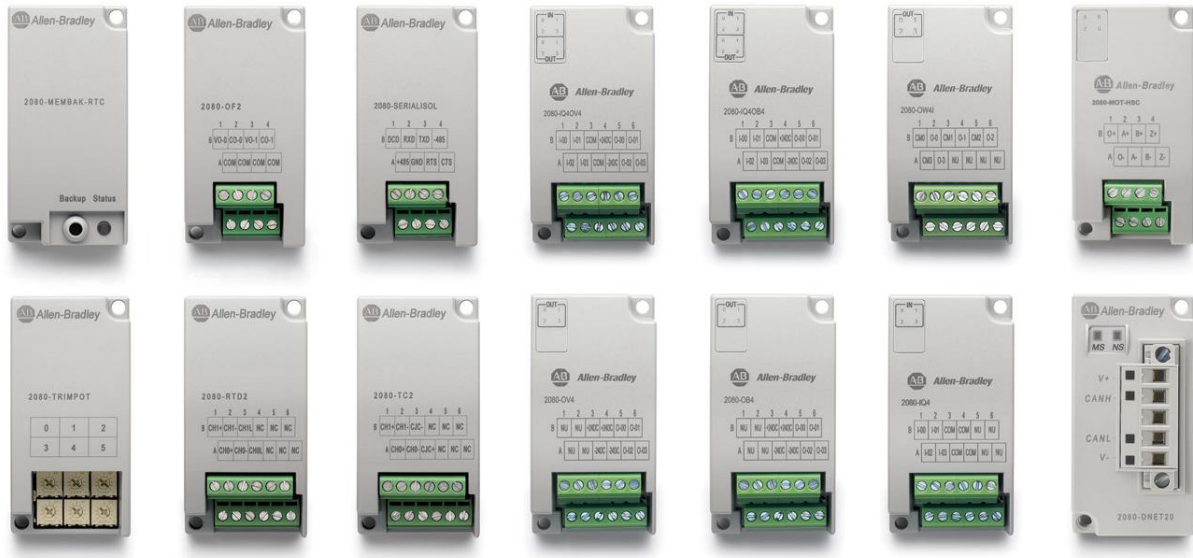

Micro800 plug-in modules extend the functionality of embedded I/O without increasing the footprint of the controller. It improves performance by adding additional processing power or capabilities and adds additional communication functionality. Micro820, Micro830, Micro850, and Micro870 controllers support plug-in modules.

Micro800 accessories consist of a Remote LCD (compatible with Micro820 controllers only), an LCD with keypad (compatible with Micro810 controllers only), a USB adapter (compatible with Micro810 controllers only), and an expansion power supply.

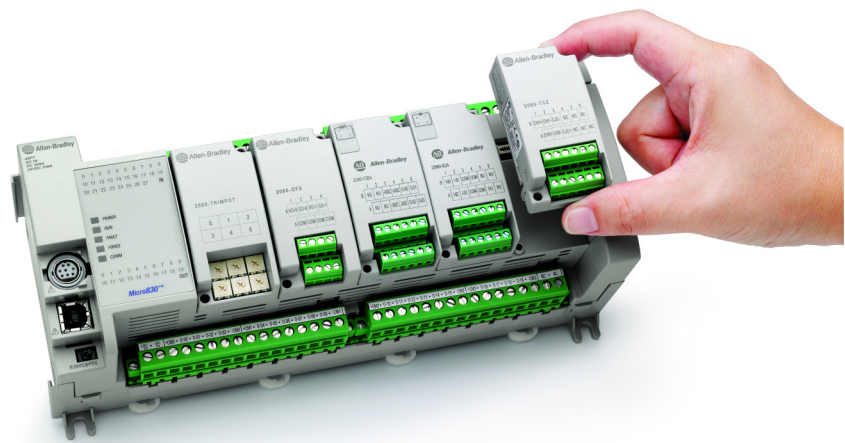


Micro800 Plug-in Modules and Accessories – Features and Compatibility

Plug-in / Accessory	Supported by			Features
	Micro810	Micro820	Micro830, Micro850, Micro870	
1.5" LCD and Keypad 2080-LCD	Yes	No	No	<ul style="list-style-type: none"> • backup module for Micro810 controllers • configure Smart Relay Function Blocks
Micro810 USB Adapter 2080-USBADAPTER	Yes	No	No	USB programming access
External Power Supply 2080-PS120-240VAC	Yes	Yes	Yes	optional controller power supply
RS232/485 Isolated Serial Port 2080-SERIALISOL	No	Yes	Yes	<ul style="list-style-type: none"> • adds additional serial communications with Modbus RTU and ASCII protocols • isolated for increased noise immunity
Digital Input, Output, Relay, and Combination Modules 2080-IQ4, 2080-IQ4OB4, 2080-IQ4OV4, 2080-OB4, 2080-OV4, 2080-OW4I	No	Yes	Yes	<ul style="list-style-type: none"> • 4-channel inputs/outputs or combination modules • configurable as voltage and current inputs • sink or source output • 4-channel relay outputs
High Speed Counter 2080-MOT-HSC	No	Yes	Yes	<ul style="list-style-type: none"> • Up to a minimum of 250 KHz differential line driver for improved noise immunity and additional dedicated I/O • One Quadrature (ABZ) differential inputs alternately configurable for pulse internal, pulse with external direction, A-up and B-down input configurations, and quadrature mode • User-configurable minimum and maximum values, preset, and Z operation
DeviceNet® Scanner 2080-DNET20	No	Yes	Yes	<ul style="list-style-type: none"> • Scanner mode – scan devices such as CompactBlock™ LDX, PowerFlex® drives, overloads and sensors
Remote LCD 2080-REMLCD	No	Yes	No	<ul style="list-style-type: none"> • Operator interface for configuring such settings as IP address on Micro820 controller • With RS232 and USB ports
Non-isolated Unipolar Analog Input/Output 2080-IF2, 2080-IF4, 2080-OF2	No	Yes	Yes	<ul style="list-style-type: none"> • adds up to 20 embedded analog I/O with 12-bit resolution (with 48-point controllers) • 2 channels for 2080-IF2, 2080-OF2 • 4 channels for 2080-IF4
Non-isolated Thermocouple 2080-TC2	No	Yes	Yes	<ul style="list-style-type: none"> • for temperature control, when used with PID • 2 channels for 2080-TC2 and 2080-RTD2
Non-isolated RTD 2080-RTD2	No	Yes	Yes	
Memory Module with RTC 2080-MEMBAK-RTC, 2080-MEMBAK-RTC2	No	No	Yes ⁽¹⁾	<ul style="list-style-type: none"> • backup project data and application code • high accuracy real-time clock
6-Channel Trim Potentiometer Analog Input 2080-TRIMPOT6	No	Yes	Yes	adds six analog presets for speed, position and temperature control

(1) 2080-MEMBAK RTC is not supported on Micro870 controllers.

Micro800 Plug-In Modules *Digital Input, Output, Relay, and Combination Plug-Ins*

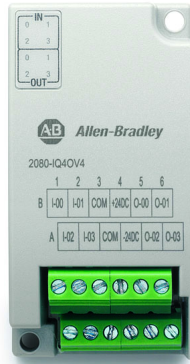

Specifications – 2080-IQ4, 2080-IQ4OB4, 2080-IQ4OV4, 2080-OB4, 2080-OV4

Attributes	2080-IQ4	2080-IQ4OB4	2080-IQ4OV4	2080-OB4	2080-OV4
Number of I/O	4 inputs	4 channel inputs/ source outputs combination	4 channel inputs/sink outputs combination	4 source outputs	4 sink outputs
On-state voltage, min	9.0V DC 10.25V AC (rms)			10V DC	
On-state voltage, nom				24V DC	
On-state voltage, max	30V DC 30V AC (rms)			30V DC	
On-state current, min	2.0 mA @ 9V DC 2.0 mA @ 9V AC (rms)			5.0 mA @ 10V DC	
On-state current, nom	3.0 mA @ 24V DC				
On-state current, max	5.0 mA			0.5 A, steady state 2 A, surge for 2 s, min	
Off-state voltage, max	5V DC 3.5V AC (rms)			–	
Off-state current, max	1.5 mA			–	
Power supply voltage			10.8V DC, min 30V DC, max		
Mounting torque	0.2 Nm (1.48 lb-in.)				
Status indicators	4 yellow	8 yellow		4 yellow	
Terminal base screw torque	0.22...0.25 Nm (1.95...2.21 lb-in.) using a 2.5 mm (0.10 in.) flat-blade screwdriver				
Isolation voltage	50V (continuous), Basic Insulation Type, Inputs to Backplane Type tested for 60 s @ 720V DC, Inputs to Backplane	50V (continuous), Basic Insulation Type, Inputs to Outputs, I/Os to Backplane Type tested for 60 s @ 720V DC, I/Os to Backplane			
Wire size	0.2... 2.5 mm ² (24...12 AWG) solid or stranded copper wire rated @ 90 °C (194 °F), or greater, insulation max				
North American temp code	T4				



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Environmental Specifications – 2080-IQ4, 2080-IQ40B4, 2080-IQ40V4, 2080-OB4, 2080-OV4

Attributes	Value
Temperature, operating	-20...65 °C (-4...149 °F)
Temperature, surrounding air, max	65 °C (149 °F)
Temperature, nonoperating	40...85 °C (-40...185 °F)
Relative humidity	5...95% noncondensing
Vibration	2 g @ 10...500 Hz
Shock, operating	25 g
Shock, nonoperating	25 g

Specifications – 2080-OW4I

Attribute	Value
Number of I/O	4-channel relay output
Inrush current	<120 mA @ 3.3V <120 mA @ 24V
Backplane power	3.3 VDC, 38 mA
Output current, resistive	2 A @ 5...30V DC 0.5 A @ 48V DC 0.22 A @ 125V DC 2 A @ 125V AC 2 A @ 240V AC
Output current, inductive	1.0 A steady state @ 5...28V DC 0.93 A steady state @ 30V DC 0.5 A steady state @ 48V DC 0.22 A steady state @ 125V DC 2.0 A steady state, 15 A make @ 125V AC, PF – cos θ = 0.4 2.0 A steady state, 7.5 A make @ 240V AC, PF – cos θ = 0.4
Output power, resistive, max	250V A for 125V AC resistive loads 480V A for 240V AC resistive loads 60V A for 30V DC resistive loads 24V A for 48V DC resistive loads 27.5V A for 125V DC resistive loads
Output power, inductive break, max	180 VA for 125V AC inductive loads 180 VA for 240V AC inductive loads 28 VA for 28.8V DC inductive loads 28 VA for 48V DC inductive loads 28 VA for 125V DC inductive loads
Pilot duty rating	C300, R150
Minimum load, per point	10 mA

Specifications – 2080-0W4I

Attribute	Value					
Initial contact resistance of relay, max	30 m					
Output delay time, max Off to On On to Off	10 ms					
Relay contact (0.35 power factor)	Max Volts	Amperes		Amperes	Volt Amperes	
		Make	Break	Continuous	Make	Break
	120V AC	15 A	1.5 A	2.0 A	1800V A	180V A
	240V AC	7.5 A	0.75 A			
	24V DC	1.0 A		1.0 A	28V A	
125V DC	0.22 A					




At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Environmental Specifications – 2080-0W4I

Attributes	Value
Temperature, operating	-20...65 °C (-4...149 °F)
Temperature, surrounding air, max	65 °C (149 °F)
Temperature, nonoperating	40...85 °C (-40...185 °F)
Relative humidity	5...95% noncondensing
Vibration	2 g @ 10...500 Hz
Shock, operating	10 g
Shock, nonoperating	DIN rail mount: 25 g Panel mount: 35 g

Analog Input and Output Plug-ins

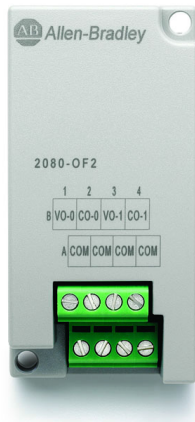

Specifications – 2080-IF2, 2080-IF4, 2080-OF2

Attribute	2080-IF2	2080-IF4	2080-OF2
Number of I/O	2 inputs, unipolar nonisolated	4 inputs, unipolar nonisolated	2 outputs, unipolar nonisolated
Voltage range	0...10V		
Current range	0...20 mA		
Power consumption	<60 mA 3.3V		<60 mA @ 24V
Input impedance	>100 k Ω for voltage mode 250 Ω for current mode		–
Voltage resistive load, min			1 k Ω
Current resistive load	–		500 Ω
Mounting torque	0.2 Nm (1.48 lb-in.)		
Terminal screw torque	0.22...0.25 Nm (1.95...2.21 lb-in.) using a 2.5 mm (0.10 in.) flat-blade screwdriver		
Wire size	Solid: 0.14 mm ² (26 AWG), min 1.5 mm ² (16 AWG), max Stranded: 0.14 mm ² (26 AWG), min 1.0 mm ² (18 AWG), max Rated @ 90 °C (194 °F) insulation max		
North American temp code	T4		
Temperature, operating	-20...65 °C (-4...149 °F)		
Temperature, surrounding air, max	65 °C (149 °F)		
Temperature, nonoperating	-40...85 °C (-40...185 °F)		

Thermocouple and RTD



Specifications – 2080-RTD2, 2080-TC2

Attribute	2080-RTD	2080-TC2
Number of I/O	2-channel non-isolated RTD	2-channel non-isolated Thermocouple
Common mode rejection ratio	100 dB @ 50/60Hz	
Normal mode rejection ratio	70 dB @ 50/60 Hz	
RTD types supported	100 Ω Platinum 385, 200 Ω Platinum 385, 500 Ω Platinum 385, 1000 Ω Platinum 385, 100 Ω Platinum 392, 200 Ω Platinum 392, 500 Ω Platinum 392, 1000 Ω Platinum 392, 10 Ω Copper 427, 120 Ω Nickel 672, 604 Ω Nickel-Iron 518	–
Thermocouple types supported	–	J, K, N, T, E, R, S, B
Terminal screw torque	0.22...0.25 Nm (1.95...2.21 lb-in.) using a 2.5 mm (0.10 in.) flat-blade screwdriver	
Wire size	Solid: 0.14 mm ² (26 AWG), min 1.5 mm ² (16 AWG), max Stranded: 0.14 mm ² (26 AWG), min 1.0 mm ² (18 AWG), max Rated @ 90 °C (194 °F) insulation max	
North American temp code	T4	
Temperature, operating	-20...65 °C (-4...149 °F)	
Temperature, surrounding air, max	65 °C (149 °F)	
Temperature, nonoperating	-40...85 °C (-40...185 °F)	

Trimpot Analog Input



Specifications – 2080-TRIMPOT6

Attribute	Value
Number of inputs	6-channel, Trimpot
Mounting torque	0.2 Nm (1.48 lb-in.)
North American temp code	T4
Temperature, operating	-20...65 °C (-4...149 °F)
Temperature, surrounding air, max	65 °C (149 °F)
Temperature, nonoperating	-40...85 °C (-40...185 °F)

Memory Backup and High Accuracy RTC Plug-In



Specifications – 2080-MEMBAK-RTC, 2080-MEMBAK-RTC2⁽¹⁾


Attribute	Value
Power off, battery	3.5 years from date of manufacture @ 25...65 °C, 2.5 years from date of manufacture @ 0 °C
Mounting torque	0.2 Nm (1.48 lb-in)
Terminal screw torque	0.22...0.25 Nm (1.95...2.21 lb-in.) using a 2.5 mm (0.10 in.) flat-blade screwdriver
North American temp code	T4
Temperature, operating	-20...65 °C (-4...149 °F)
Temperature, surrounding air, max	65 °C (149 °F)
Temperature, nonoperating	-40...85 °C (-40...185 °F)

(1) 2080-MEMBAK-RTC is not supported on Micro820 and Micro870 controllers. 2080-MEMBAK-RTC2 is not supported on Micro820 controllers.

IMPORTANT

Battery life does not include controller ON time. For example, if the Controller is ON for 16 hours every day for 365 days, and the module starts being used after 1 year of manufacturing, battery life is 8.5 years (1 year initial time + 2.5 years of Off time out of 7.5 years).


RS232/485 Serial Port Plug-in

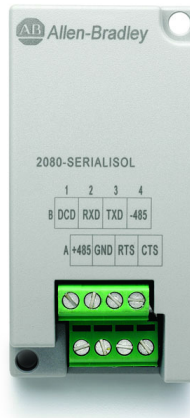

Specifications – 2080-SERIALISOL

Attribute	Value
Mounting torque	0.2 Nm (1.48 lb-in)
Terminal screw torque	0.22...0.25 Nm (1.95...2.21 lb-in.) using a 2.5 mm (0.10 in.) flat-blade screwdriver
Wire size	Solid: 0.14 mm ² (26 AWG), min 1.5 mm ² (16 AWG), max Stranded: 0.14 mm ² (26 AWG), min 1.0 mm ² (18 AWG), max Rated @ 90 °C (194 °F) insulation max
Isolation voltage	500V AC
North American temp code	T4
Temperature, operating	-20...65 °C (-4...149 °F)
Temperature, surrounding air, max	65 °C (149 °F)
Temperature, nonoperating	-40...85 °C (-40...185 °F)

DeviceNet

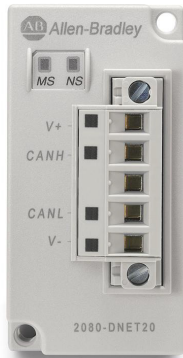

Specifications – 2080-DNET20

Attribute	Value
DeviceNet Communication Rate, max	125 Kbps – 420 m (1378 ft.) 250 Kbps – 200 m (656 ft.) 500 Kbps – 75 m (246 ft.)
DeviceNet current	24V DC, 300 mA Class 2
Wire size	0.25... 2.5 mm ² (22...14 AWG) solid or stranded copper wire rated @ 75 °C (167 °F), or greater, 1.2 mm (3/64 in.) insulation max
Network protocol	I/O Slave Messaging: Poll Command
Backplane power consumption	50 mA @ 24V DC
Power dissipation	1.44 W
Number of nodes, max	20 nodes for I/O operation

High Speed Counter



Specifications – 2080-MOT-HSC

Attribute	Value
Number of inputs	1 Quadrature (ABZ) differential input
Input Frequency, max	250 kHz (50% duty)
Wire size	Solid: 0.14...1.5 mm ² (26...16 AWG) Stranded: 0.14...1.0 mm ² (26...18 AWG) Rated @ 90 °C (194 °F) insulation max
Input impedance	3580 Ω
Pulse width, min	2 μs
All supply power and/or current ratings	Input/Output: 24V DC
Isolation voltage	Input module: 50V (continuous), Basic Insulation Type, Inputs/Outputs to Backplane. Type tested for 60s @ 720V DC, Inputs/Outputs to Backplane



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Micro800 Accessories

Micro810 LCD

Specifications – 2080-LCD

Attribute	Value
North American temp code	T5
Temperature, operating	-20...55 °C (-4...131 °F)
Temperature, surrounding air, max	55 °C (131 °F)
Temperature, nonoperating	-40...85 °C (-40...185 °F)

Micro810 USB Adapter

Specifications – 2080-USBADAPTER

Attribute	Value
USB cable connector type	USB type A-B male-male
North American temp code	T5
Temperature, operating	-20...55 °C (-4...131 °F)
Temperature, surrounding air, max	55 °C (131 °F)
Temperature, nonoperating	-40...85 °C (-40...185 °F)

Remote LCD

For Micro820 Controller only.

Specifications – 2080-REMLCD

Attribute	Value
Dimensions (HxWxD)	97 x 130 x 35.5 mm (3.82 x 5.12 x 1.40 in.)
Display type	192 x 64 pixel monochrome
Display size	48 x 106.5 mm (1.89 x 4.19 in.)
Backlight	25000 hrs @ 25 °C LED; tricolor backlight (RGB)
Operator input	Tactile keys (function keys, arrow keys, ESC and OK keys)
Programming port	USB to serial converter for programming the controller
Input supply voltage	12V/24V DC (±10%)
Input supply current, max	90 mA @ 12V and 60 mA @ 24V
Power consumption, max	1.5 W
Weight, approx.	405 g (0.89 lb) – includes packaging weight
Wire size	Single-wire gauge: 0.14...1.5 mm ² (26...16 AWG) rated @ 90 °C (194 °F) Dual-wire gauge: 0.14...0.75 mm ² (26...18 AWG) rated @ 90 °C (194 °F)
Wire type	Copper
Wiring category ⁽¹⁾	3 – on power ports; 3 – on communication port
Enclosure type ratings	Meets IP65 (when front panel mounted)
North American temp code	T4

(1) Use this conductor category information.



*External Power Supply***Specifications – 2080-PS120-240VAC**

Attribute	Value
Dimensions (HxWxD)	90 x 45 x 80 mm (3.55 x 1.78 x 3.15 in)
Shipping weight, approx	0.34 kg (0.75 lb)
Supply voltage range ⁽¹⁾	100V...120V AC, 1 A 200...240V AC, 0.5 A
Supply frequency	47...63 Hz
Supply power	24V DC, 1.6 A
Inrush current, max	24 A @ 132V for 10 ms 40 A @ 263V for 10 ms
Power consumption ⁽²⁾ (Output power)	38.4 W @ 100V AC 38.4 W @ 240V AC
Power dissipation (Input power)	45.1 W @ 100V AC 44.0 W @ 240V AC
Isolation voltage	250V (continuous), Primary to Secondary: Reinforced Insulation Type Type tested for 60s @ 2300V AC primary to secondary and 1480V AC primary to earth ground.
Output ratings	24V DC, 1.6 A, 38.4 W max.

(1) Any fluctuation in voltage source must be within 85...264V. Do not connect the adapter to a power source that has fluctuations outside of this range.

(2) When setting up a Micro800 system, verify that total power consumption of the controller, plug-in and expansion I/O does not exceed the output power capacity of the power supply used.

Specifications – 2080-PSAC-12W

Attribute	Value
Dimensions (HxWxD)	90 x 39 x 75 mm (3.54 x 1.54 x 2.95 in)
Shipping weight, approx	0.2 kg (0.44 lb)
Supply voltage range ⁽¹⁾	100V...120V AC, 0.7 A 200...240V AC, 0.4 A
Supply frequency	47...63 Hz
Supply power	24V DC, 0.9 A @ 50 °C 24V DC, 0.5 A @ 65 °C
Inrush current, max	25 A @ 132V for 10 ms 40 A @ 265V for 10 ms
Power consumption ⁽²⁾ (Output power)	21.6 W @ 50 °C 12 W @ 65 °C
Power dissipation (Input power)	27 W (115V AC), 26.7 W (230V AC) @ 50 °C 15.4 W (115V AC), 15.2 W (230V AC) @ 65 °C
Isolation voltage	250V (continuous), Primary to Secondary: Reinforced Insulation Type Type tested for 60s @ 2300V AC primary to secondary and 1350V AC primary to earth ground.
Output ratings	24V, 0.9 A, 21.6W @ 50 °C 24V, 0.5 A, 12W @ 65 °C

(1) Any fluctuation in voltage source must be within 88...264V. Do not connect the adapter to a power source that has fluctuations outside of this range.

(2) When setting up a Micro800 system, verify that total power consumption of the controller, plug-in and expansion I/O does not exceed the output power capacity of the power supply used.

Embedded Serial Port Cables

For Micro830, Micro850, and Micro870 controllers.

Embedded Serial Port Cable Selection Chart

Connectors	Length	Cat. No.	Connectors	Length	Cat. No.
8-pin Mini DIN to 8-pin Mini DIN	0.5 m (1.5 ft)	1761-CBL-AM00 ⁽¹⁾	8-pin Mini DIN to 9-pin D Shell	0.5 m (1.5 ft)	1761-CBL-AP00 ⁽¹⁾
8-pin Mini DIN to 8-pin Mini DIN	2 m (6.5 ft)	1761-CBL-HM02 ⁽¹⁾	8-pin Mini DIN to 9-pin D Shell	2 m (6.5 ft)	1761-CBL-PM02 ⁽¹⁾
8-pin Mini DIN to 8-pin Mini DIN (with lock mechanism on both connectors)	2 m (6.5 ft)	1761-CBL-AH02	8-pin Mini DIN with lock mechanism to 9-pin D Shell	2 m (6.5 ft)	1761-CBL-PH02
—			8-pin Mini DIN to 6-pin RS-485 terminal block	30 cm (11.8 in.)	1763-NC01 series A

(1) Series C or later for Class 1 Div 2 applications.



At the end of its life, this equipment should be collected separately from any unsorted municipal waste.

Rockwell Automation Support

Rockwell Automation provides technical information on the Web to assist you in using its products.

At <http://www.rockwellautomation.com/support/>, you can find technical manuals, a knowledge base of FAQs, technical and application notes, sample code and links to software service packs, and a MySupport feature that you can customize to make the best use of these tools.

For an additional level of technical phone support for installation, configuration, and troubleshooting, we offer TechConnect support programs. For more information, contact your local distributor or Rockwell Automation representative, or visit <http://www.rockwellautomation.com/support/>.

Installation Assistance

If you experience a problem within the first 24 hours of installation, review the information that is contained in this manual. You can contact Customer Support for initial help in getting your product up and running.

United States or Canada	1.440.646.3434
Outside United States or Canada	Use the Worldwide Locator at http://www.rockwellautomation.com/support/americas/phone_en.html , or contact your local Rockwell Automation representative.

New Product Satisfaction Return

Rockwell Automation tests all of its products to ensure that they are fully operational when shipped from the manufacturing facility. However, if your product is not functioning and needs to be returned, follow these procedures.

United States	Contact your distributor. You must provide a Customer Support case number (call the phone number above to obtain one) to your distributor to complete the return process.
Outside United States	Please contact your local Rockwell Automation representative for the return procedure.

Documentation Feedback

Your comments will help us serve your documentation needs better. If you have any suggestions on how to improve this document, complete this form, publication [RA-DU002](#), available at <http://www.rockwellautomation.com/literature/>.

Rockwell Automation maintains current product environmental information on its website at <http://www.rockwellautomation.com/rockwellautomation/about-us/sustainability-ethics/product-environmental-compliance.page>.

Rockwell Otomasyon Ticaret A.Ş., Kar Plaza İş Merkezi E Blok Kat:6 34752 İçerenköy, İstanbul, Tel: +90 (216) 5698400

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Publication 2080-SG001E-EN-P - March 2019

Supersedes Publication 2080-SG001D-EN-P - December 2013

Copyright © 2019 Rockwell Automation, Inc. All rights reserved.